

Explosion Proof 2/2 Directional Valve, Solenoid Operated, Poppet Type, Piloted

SD3EX-C2*S5(S6)

1-1/16-12 UN • Q_{max} 150 l/min (40 GPM) • p_{max} 350 bar (5100 PSI)



Technical Features

- › 2/2-screw-in cartridge poppet valve with 1-1/16-12 UN connection thread
- › The valve can be bidirectionally loaded with pressure
- › High tightness of the closed valve
- › Maximum operating pressure 350 bar
- › Certification of solenoid coil ATEX (Directive 2014/34/EU) and IECEx, valid for mines and environments with potentially explosive atmospheres consisting of gases or dust
- › Coil protection by encapsulation "m" for gases and by flameproof enclosure "t" for dust
- › Robust design resistant to mechanical damage
- › Protection against static discharge by grounding the valve surface
- › Valves applicable for temperature classes T4 (135 °C), T5 (100 °C) and T6 (85 °C) depending on maximum ambient temperature
- › Optional coil supply voltage, valve connection and type of manual override
- › The valve is zinc coated for 520 h corrosion protection in NSS acc. to ISO 9227 and as protection against ignition spark in the event of mechanical impact

Product Description

Pilot operated screw-in cartridge poppet valve, operated by solenoid, bidirectionally loadable with pressure. The valve is designed to dam the fluid flow and stop the appliance. The valve is certified for use in potentially explosive atmospheres of gases, vapours, dust and combustible particles with a high protection level EPL = b.


Use of the valve in potentially explosive atmospheres

	EPS14ATEX1744 X	IECEx EPS14.0064 X
AC	Ex I M2 Ex mb I Mb	Ex mb I Mb
	Ex II 2G Ex mb IIC T4, T5, T6 Gb	Ex mb IIC T4, T5, T6 Gb
	Ex II 2D Ex mb IIIC T135°C, T100°C, T85°C Db	Ex mb IIIC T135°C, T100°C, T85°C Db
DC	Ex I M2 Ex eb mb I Mb	Ex eb mb I Mb
	Ex II 2G Ex eb mb IIC T4, T5, T6 Gb	Ex eb mb IIC T4, T5, T6 Gb
	Ex II 2D Ex tb IIIC T135°C, T100°C, T85°C Db	Ex tb IIIC T135°C, T100°C, T85°C Db

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)


Operating limits

Ambient temperature 70 °C (158 °F), Voltage U_n -10 % (24 V DC), Power P_n 10 W

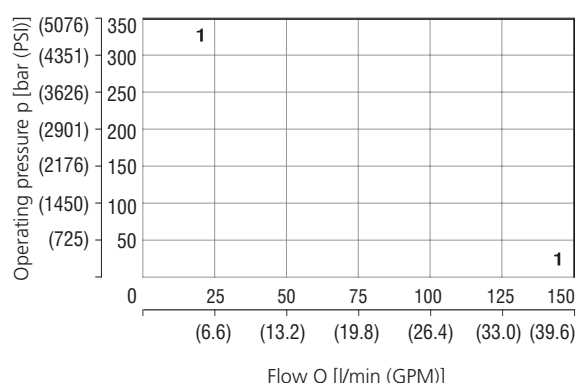

	Model	Connection
1	2S5	1→2, 2→1
1	2S6	1→2, 2→1

Pressure drop related to flow rate

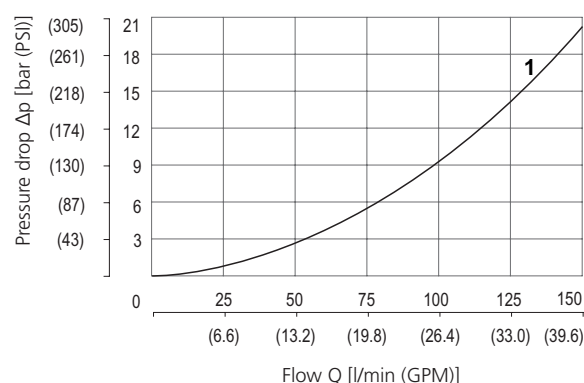

	Model	Connection	Solenoid
1	2S5	1→2, 2→1	ON
1	2S6	1→2, 2→1	OFF

For operating limits under conditions other than shown contact the technical support.

Technical Data

Valve size / Cartridge cavity		1-1/16-12 UN / C2 (VC12-2)	
Max. flow		l/min (GPM)	150 (39.6)
Max. operating pressure		bar (PSI)	350 (5080)
Fluid temperature range (NBR)		°C (°F)	-30 ... +70 (-22 ... +158)
Max. switching frequency		1/h	7 000
Weight with coil		kg (lbs)	1.70 (3.75)
Technical Data - Explosion Proof Solenoid			
Voltage type			AC 50 / 60 Hz DC
Available nominal voltages U _N		V	110, 230 12, 24, 48, 110
Available nominal input power		W	10
Supply voltage fluctuations			U _N ± 10 %
Duty cycle			S1(100 % ED)
Enclosure type acc. to EN 60529			IP66 / IP68*
*Test procedure IP68: Pressure 1 m under water, test duration 24 h. The indicated IP protection level is only achieved if the cable is properly mounted.			
Weight (coil only)		kg (lbs)	1.3 (2.87)
Ambient temperature range		°C (°F)	
Temperature class / Nominal power	T4-10 W		-30 ... +70 (-22 ... +158)
	T5-10 W		-30 ... +55 (-22 ... +131)
	T6-10 W		-30 ... +45 (-22 ... +113)
		Datasheet	Type
General information		GI_0060	Products and operating conditions
Operating Instructions		14091	
Valve bodies	In-line mounted	SB_0018	SB-C2*
	Sandwich mounted	SB-04(06)_0028	on request
Cavity details / Form tools		SMT_0019	SMT-C2*
Spare parts		SP_8010	

Ordering Code

SD3EX - C2 / H / **- B**


Explosion proof 2/2 directional valve, solenoid operated, poppet type, piloted

Valve cavity
1-1/16-12UN / C2 (VC12-2)

Model
High performance


Model / Symbol

normally closed (NC), blocking



255

normally open (NO), blocking



256

Rated supply voltage of solenoids

DC voltage (I_N)

(connection box + cable gland)

12 V DC / 0.75 A

01200

24 V DC / 0.39 A

02400

48 V DC / 0.19 A

04800

110 V DC / 0.094 A

11000

AC voltage 50/60 Hz (I_N)

(fix installed cable)

110 V AC / 0.112 A

11050

230 V AC / 0.052 A

23050

A4

A6

Certifikace ventilu
No designation ATEX, IECEx, CCC*
A IECEx for Australia and New Zealand
E EAC for EAEU** States

Surface treatment
zinc-coated (ZnNi), ISO 9227 (520 h)

Seals
No designation NBR

Manual override
No designation standard for 256 only
N7 detent assembly for 256 only
N9 without manual override




Cable length
No designation (only for DC) without cable
3 (AC and DC version) 3 m
8 (AC and DC version) 8 m

Temperature class - solenoid nominal input power
class T4 - 10 W
class T6 (T5) - 10 W

*CCC certification (China Compulsory Certification) for the People's Republic of China does not apply to the equipment group I intended for use in mines
**EAEU=Eurasian Economic Union, certificate according to TR TS 012/2011 valid for the Russian Federation, Belarus, Armenia, Kazakhstan and Kyrgyzstan.


- Besides the valve versions shown, which are the most frequently used, other special versions are available.
- Consult our technical department for their identification, feasibility and operating limits.

Manual Override in millimeters (inches)

No designation - standard for 2S6 only	N7 - detent assembly for 2S6 only	N9 - without manual override
		


In case of solenoid malfunction or power failure, the valve poppet can be shifted by manual override under the condition that the pressure in the back line does not exceed 25 bar (363 PSI).

Dimensions in millimeters (inches)

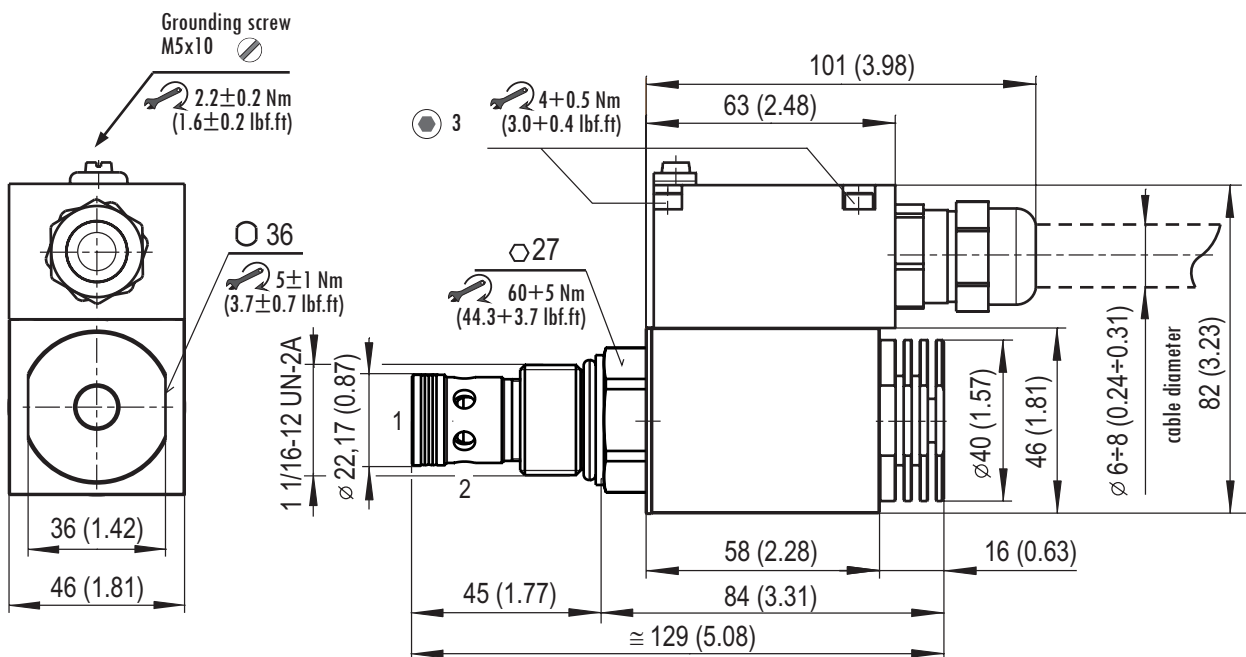

SPARE PARTS

Position	Component name	Description	Ordering number
1	Set	Coil nut	45904300
3		Nut sealing	
4		Sealing ring actuating system-coil	
2	Set	Coil nut with manual override N7	45904200
3		Nut sealing	
4		Sealing ring actuating system-coil	
5		Sealing ring of terminal box cover	34950700
6	Set	Bush sealing	SP-SK-C2-N O-ring 23.47 x 2.95 NBR Dualeal 19.62 x 22.22 x 3.8 PU 40730500

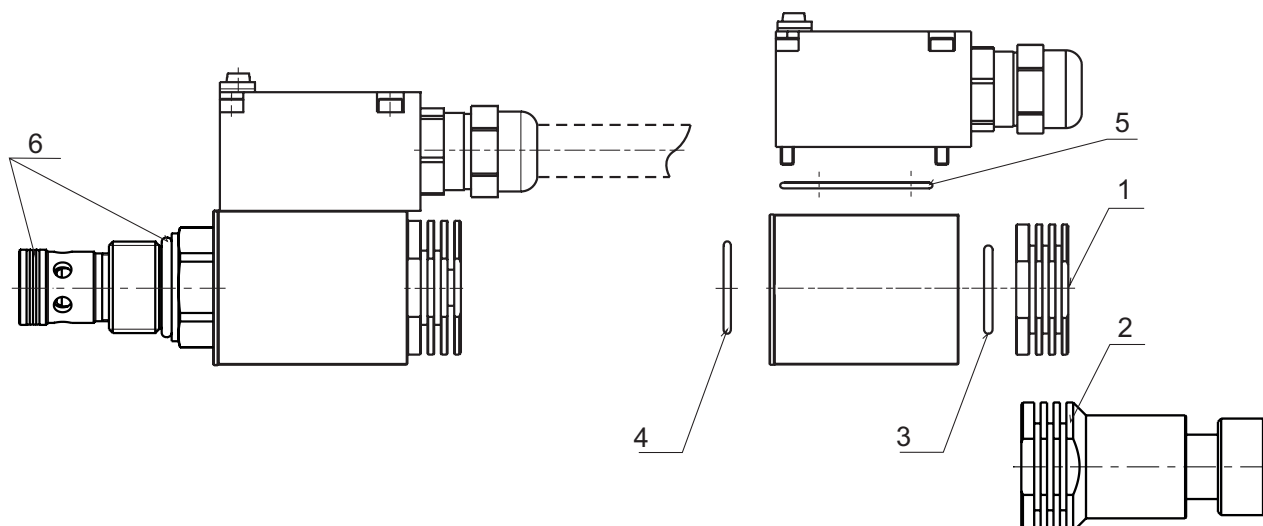

Information for customers

- › Before installing the product, please read the Product Instructions for Use, which is available in full on the manufacturer's website (www.argo-hytos.com) near the data sheet. Please also pay attention to the chapter describing the target user group, their professional qualifications and medical fitness to install, use and repair the product.
- › The product may only be used in the zones indicated, otherwise there is a risk of initiating an explosion

Area of application

Equipment - group I – MINES	Equipment - group II (IIG) - GAS		Equipment - group III (IID) - DUST	
Category M1 – NO	Zone 0 - NO		Zone 20 - NO	
Category M2 (the device remains switched off)	Zone 1	IIA (propane)	Zone 21	IIIA (combustible particles)
	Zone 2	IIB (ethylene)	Zone 22	IIIB (non-conductive dust)
		IIC (hydrogen)		IIIC (conductive dust)

- › For use in the temperature class, the maximum ambient temperature (see technical data table) must be observed for a given coil input (10 W), the maximum temperature of the working fluid 70 °C and the nominal voltage of the coil supply.
- › The user must ensure free heat dissipation from the valve surface. The surface must not be covered, exposed to a heat source or direct sunlight. When mounting the valves in groups, observe the minimum distances specified in the Instructions for Use.
- › A certified cable of temperature insulation class corresponding to the application temperature class must be used to the electrical connection of coil with DC supplying.
- › The rectifier and terminal block of coils with AC supplying are protected with encapsulation. Therefore, these coils are only supplied with mounted cable. No modification to the connected cable are allowed except for shortening the cable to a suitable length and fitting a connector to the free end.
- › The valve surface must be grounded using the screw on the terminal box cover of coil to prevent electrostatic discharge.
- › It is forbidden to install, dismantle or repair the product in an explosive atmosphere. Repairs to the product shall be carried out by the manufacturer, except for repairs permitted by the user under the conditions specified in the Instructions for Use.
- › Attention! The surface of the coil and the valve gets hot during operation. There is a risk of skin burns if touched.