


WEH/WH

Hydraulic or Electro-hydraulic Directional Valve

Size 10~32

Maximum working pressure 350 bar

Maximum working flow 1100 L/min

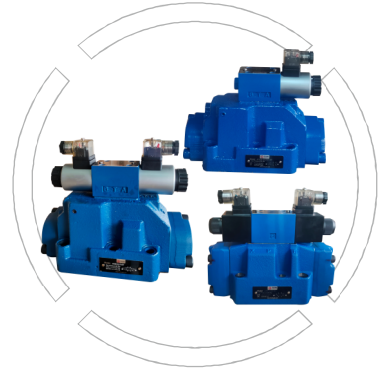

Index

Page No

• Features	01
• Directional valve model WEH	02
• Directional valve model WH	02
• Function description, sectional drawing	03
• Ordering code	05
• Functional Symbol	06
• Technical Specifications	09
• Characteristic curves 4WEH10 & Characteristic limit 4WEH10	11
• Characteristic curves 4WEH16 & Characteristic limit 4WEH16	12
• Characteristic curves 4WEH22 & Characteristic limit 4WEH22	13
• Characteristic curves 4WEH25 & Characteristic limit 4WEH25	14
• Characteristic curves 4WEH32 & Characteristic limit 4WEH32	15
• Switching time adjustment, pressure reducing valves and pre load valve	16
• Unit Dimensions 4WEH10	17
• Unit Dimensions 4WEH16	19
• Unit Dimensions 4WEH22	21
• Unit Dimensions 4WEH25	22
• Unit Dimensions 4WEH32	24

Features

- Mainly used to control the opening, closing and direction of liquid flow
- Electro-hydraulic operation (WEH)
- Hydraulic operation (WH)
- Subplate mounting
- The mounting surface according to DIN24340 form A and ISO4401
- Spring or hydraulic centered, Spring or hydraulic return to initial position
- Wet-pin DC or AC solenoid Optional manual emergency operation
- Individual or central electrical connection
- Optional switching time adjustment
- Optional pre-load valve in port P of the main valve
- Auxiliary component, optional
 - Stroke adjustment of main spool
 - Stroke adjustment or end position sensor
 - Inductive or mechanical limit switch (proximity type) of the main spool



Directional valve model WEH

The WEH directional valve is a directional spool valve with electro-hydraulic operation. It is used to control the opening, closing and direction of the liquid flow. The valve mainly consists of valve body (1), main control spool (2), main valve with one or two reset springs (3.1) and (3.2), pilot valve (4) with one or two solenoids "a" (5.1) and "b" (5.2).


The main control spool is held in the neutral or initial position by the springs or pressure. For the valve with spring-centered, the two spring chambers (6) and (8) are connected to the oil tank through the pilot valve in the initial position. The pilot valve (4) is supplied with oil through the control line (7). The control oil can be supplied internally or externally (externally via port X). The main control spool (2) is hydraulically operated by the pilot valve (4). Due to the operating of the pilot valve on one end of the main control spool, the spool moves to the operation position, then the valve opens in the operation direction and the fluid flows from P to A and B to T or P to B and A to T. The control oil can be drained internally or externally. An optional manual emergency operation (9) can move the control spool (10) in the pilot valve (4) when the solenoid is not energized.

Directional valve model WH


The WH directional valve is a hydraulically operated directional spool valve. It is used to control the opening, closing and direction of liquid flow.

The valve mainly consists of valve body (1), main control spool (2), one or two reset springs (3.1) and (3.2) with spring centered or spring return functions, and control cover (11).

The main control spool is operated by hydraulic directly. The spool is held in the neutral or initial position by springs or hydraulic pressure. The control oil is supplied and drained externally. For the 4/3-way valve with spool spring centered, the main control spool (2) is held in the neutral position by two centered springs. The two spring chambers (6, 8) are connected to the oil ports X and Y through the control cover (11). When one end of the main control spool (2) is pressurized, the spool moves to the working position, thereby connecting the corresponding oil circuit.

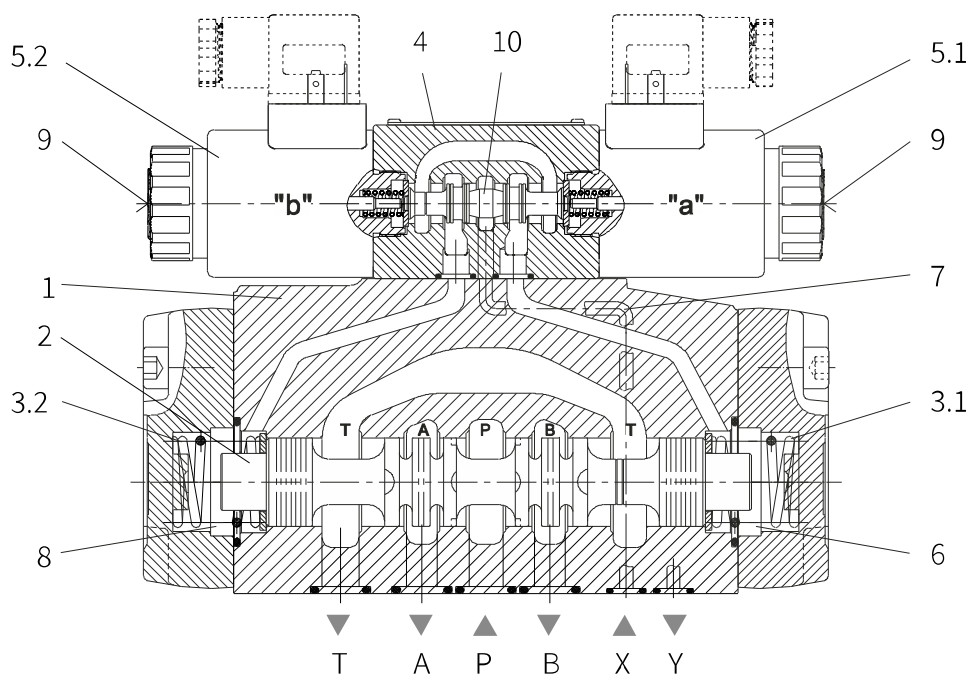

Directional valve model 4WEH.



Model 4WH...




Function description, sectional drawing

4/3-way directional valve with hydraulic centered of main valve, model WEH..H/

In this structure, the pressure oil acts on both end surfaces of the main control spool (2). The centering sleeve (10) locates the main control spool (2) and keeps it in the middle position.

If one end of the main control spool (2) is unloaded, the main control spool (2) moves to the working position under the pressure from the other end, thereby changing the direction of the oil flow. The unloaded control spool face displaces the returning pilot oil into port Y externally through the pilot valve (4). The oil is drained internal from port L to the tank directly.

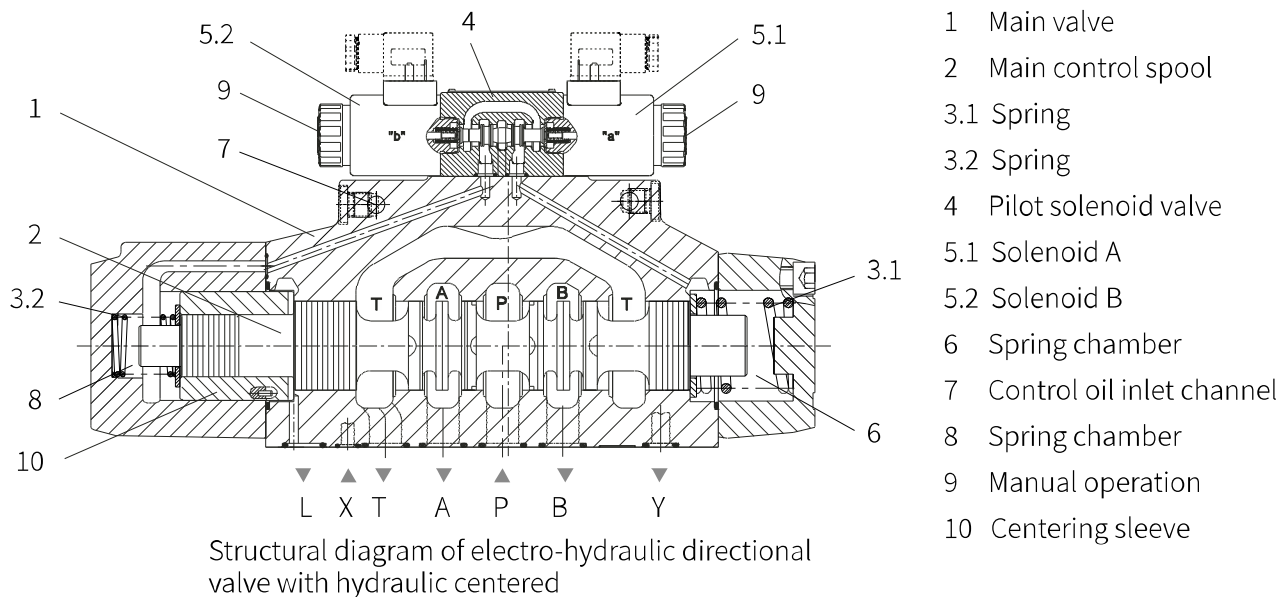

Pilot oil supply


● Model WEH10

◆ Conversion between internal supply and external supply:

The channel P on the top of the main valve body with M6 screw (3) is external supply, and is internal supply when M6 screw (3) is dismantled.

◆ Conversion between internal drain and external drain:

Removing the plug (1) and installing M6 screw (2) is external drain, dismantling M6 screw (2) is internal drain.

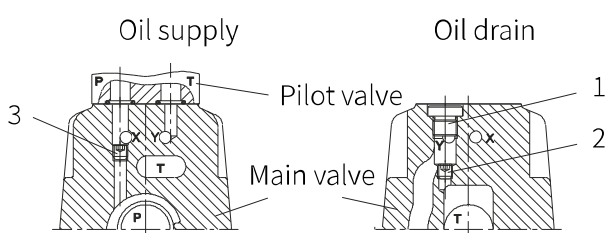


structure diagram of model WEH10...4X
supply and drain

◆ Conversion between internal supply and external supply:

The channel P on the bottom of the main valve with M6 screw (8) is external supply, and is internal supply when M6 screw (8) is dismantled.

◆ Conversion between internal drain and external drain:

The channel T on the top of the main valve with M6 screw (7) is external drain, and is internal drain when M6 screw (7) is dismantled.

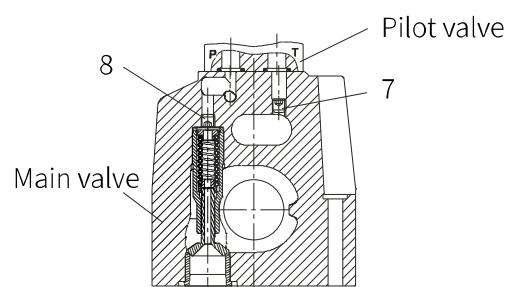

structure diagram of model WEH16...7X
supply and drain



Function description, sectional drawing

Pilot oil supply


● Model WEH25

◆ Conversion between internal supply and external supply:

The channel P on the top of the main valve with M6 screw (9) is external supply, and is internal supply when M6 screw (9) is dismantled.

◆ Conversion between internal drain and external drain:

The channel T on the top of the main valve with M6 screw (10) is external drain, and is internal drain when M6 screw (10) is dismantled.

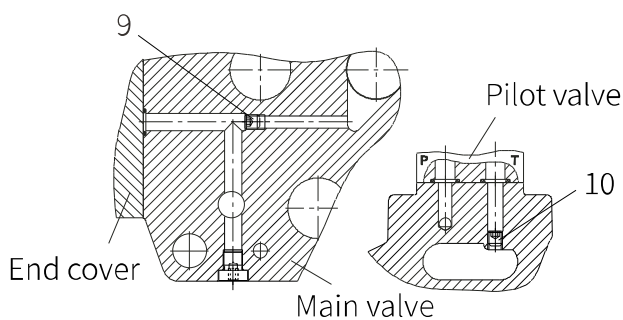

structure diagram of model WEH25...
supply and drain


● Model WEH32

◆ Conversion between internal supply and external supply:

The channel P on the top of the main valve with M6 screw (11) is external supply and is internal supply when M6 screw (11) is dismantled.

◆ Conversion between internal drain and external drain:

The channel T on the top of the main valve with M6 screw (12) is external drain and is internal drain when M6 screw (12) is dismantled.

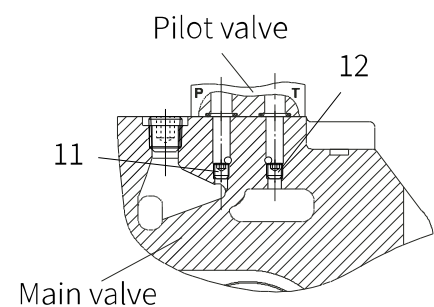

structure diagram of model WEH32...
supply and drain



Ordering code

	4					J	/						/				*
working pressure to 35MPa	=no code																more information in text
four-way version	=4																sealing material
operation type																	No code= NBR seals
electro-hydraulic	=WEH																V= FKM seals
hydraulic control	=WH																(consult for other seals)
size																	No code= without pressure
size 10	=10																reducing valve
size 16	=16																D3 ²⁾ = with pressure
size 22	=22																reducing valve
size 25	=25																
size 32	=32																
main valve hydraulic return or centered	=H																pre-load valve(not for size 10)
main valve spring return or centered	=No code																No code= without pre-load valve
functional symbols (see functional symbol diagram)																	P4.5= with pre-load valve,
40 to 49 series (size 10)	=4X																cracking pressure 0.45MPa
60 to 69 series (size 25, 32)	=6X																P6.0= with pre-load valve,
70 to 79 series (size 16, 22)	=7X																cracking pressure 0.6MPa
THM	=T																No code= no plug-in throttle
when the pilot valve is a 2-position valve with two solenoids and hydraulic return in the main valve																	B08= throttle Ø0.8mm
without reset spring	=O																B10= throttle Ø1.0mm
without reset spring with detent	=OF																B12= throttle Ø1.2mm
pilot valve with wet-pin solenoid with threaded connection	=6E																B15= throttle Ø1.5mm
DC voltage 24V	=G24																additional device number (see additional device drawing)
AC voltage 220V, 50Hz/60Hz																	
for other voltages and frequencies, see directional valve WE6	=W220																electrical connection
																	K4= no insert plug
																	Z5L= large right angle lamp plug
																	FS2= deutsch water-proof plug
																	DL= connection box with lamp, centralized connection
																	No code= without switching time adjustment
																	S= switching time adjustment as meter-in control
																	S2=switching time adjustment as meter-out control
																	pilot oil supply
																	No code= pilot oil supply and drain external
																	E= pilot oil supply internal and drain external
																	ET ¹⁾ = pilot oil supply and drain internal
																	T= pilot oil supply external and drain internal
																	(for model 4WH...only available as "no code")
																	(the 3-position valve with hydraulic centered in ET and T types must meet:
																	P pilot ≥ 2xP tank + P pilot min)
																	No code = without manual emergency operation
																	N9= with hidden manual emergency operation

1) For internal oil supply

*Minimum control pressure: see page 231

*To avoid impermissible maximum force peaks, a throttle (B10) must be installed in port P of the pilot valve


2) Only in conjunction with throttle "B10"




Functional Symbol

Detailed and simplified symbols for 3-position directional valves

Spring centered

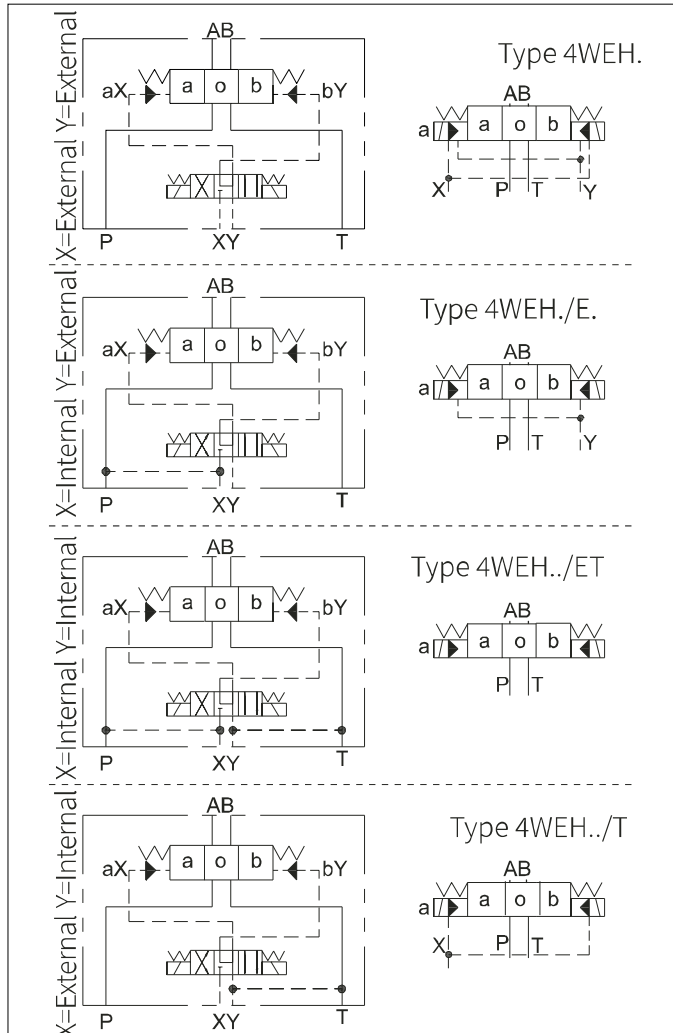

Hydraulic centered

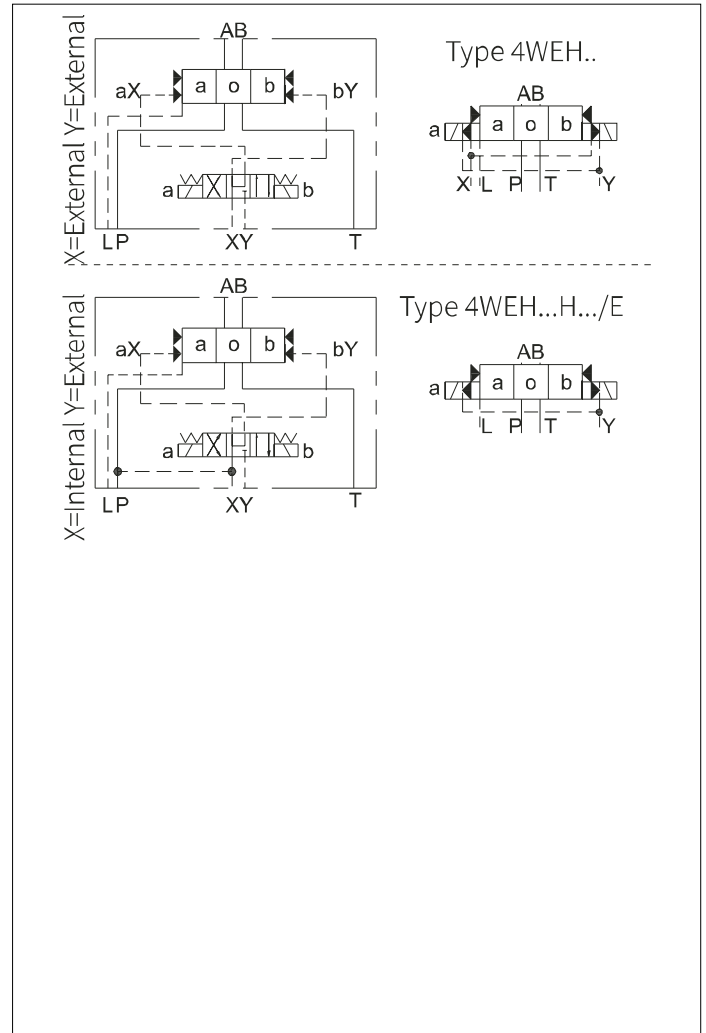


Spring return valves

(the solenoid at end A or B of the 2-position valve derived from the 3-position valve)



Hydraulic return valves

(the solenoid at end A or B of the 2-position valve derived from the 3-position valve)

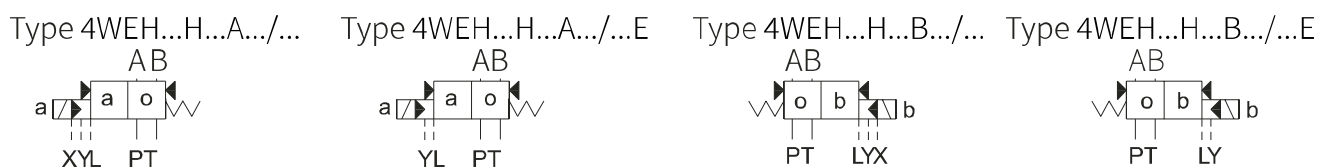



Functional Symbol

Functional symbols of 3-position valves

3-position valve

3-position valve model	Functional symbol	Transition function
4WEH...E.../... E		
4WEH...F.../... F		
4WEH...G.../... G		
4WEH...H.../... H		
4WEH...J.../... J		
4WEH...L.../... L		
4WEH...M.../...M		
4WEH...P.../... P		
4WEH...Q.../... Q		
4WEH...R.../... R		
4WEH...S.../... S		
4WEH...T.../... T		
4WEH...U.../... U		
4WEH...V.../... V		
4WEH...W.../...W		


2-position valve derived from 3-position valve

2-position valve model	Functional symbol (Solenoid at end A)	2-position valve model	Functional symbol (Solenoid at end B)
4WEH...EA.../... E		4WEH...EB.../... E	
4WEH...FA.../... F		4WEH...FB.../... F	
4WEH...GA.../... G		4WEH...GB.../... G	
4WEH...HA.../... H		4WEH...HB.../... H	
4WEH...JA.../... J		4WEH...JB.../... J	
4WEH...LA.../... L		4WEH...LB.../... L	
4WEH...MA.../... M		4WEH...MB.../... M	
4WEH...PA.../... P		4WEH...PB.../... P	
4WEH...QA.../... Q		4WEH...QB.../... Q	
4WEH...RA.../... R		4WEH...RB.../... R	
4WEH...SA.../... S		4WEH...SB.../... S	
4WEH...TA.../... T		4WEH...TB.../... T	
4WEH...UA.../... U		4WEH...UB.../... U	
4WEH...VA.../... V		4WEH...VB.../... V	
4WEH...WA.../... W		4WEH...WB.../... W	



Functional Symbol

Detailed and simplified symbols for 2-position directional valves

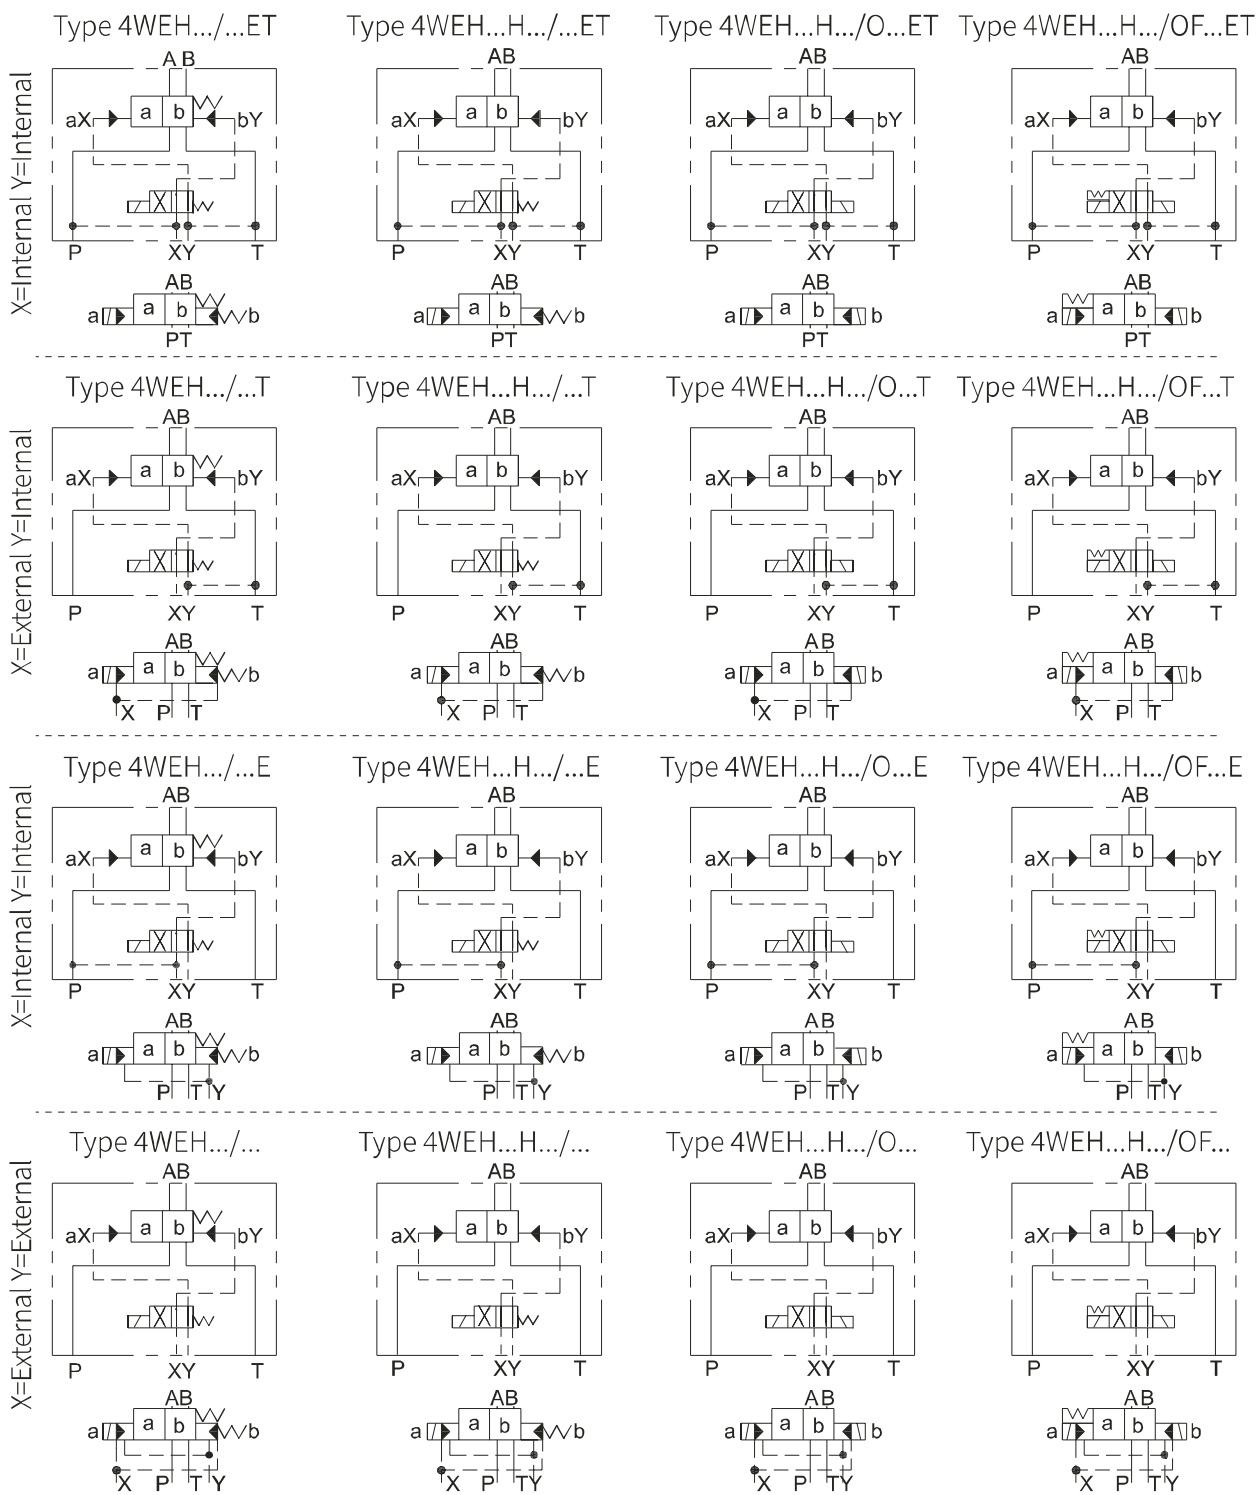

Function symbols of 2-position valves

Spool valve function:	C	D	K	Z	Y
Spool valve function symbol:					
Transition function:					



Technical Specifications

Size		10	16	22	25	32
Maximum working pressure						
Oil ports P, A, B (MPa)		35	35	35	35	35
Oil port T	External Y port pilot oil drain (MPa)	31.5 ⁵⁾	25	25	25	25
	Internal Y port pilot oil drain (MPa)	21 D C				
	(MPa)	16 A C				
Oil port Y	-DC solenoid (MPa)	21 DC				
External pilot oil drain	-AC solenoid (MPa)	16 AC				
	For 4WH type (MPa)	25 (size 10、16 、 25、 32) 21 (size 22)				
Maximum pilot pressure (MPa) (For high pilot pressure, a pressure reducing valve is required)		25 (size 10、16 、 25、 32) 21 (size 22)				
Minimum pilot pressure -Pilot oil supply X external -Pilot oil supply X internal (Not for spool C, F, G, H, P, T, V, Z, S ²⁾)		H-4W...				
	Spring centered 3-position valve (MPa)	1.0	1.4	1.25	1.3	0.85
	Pressure centered 3-position valve (MPa)	-	1.4	1.05	1.8	0.85
	Spring centered 2-position valve (MPa)	1.0	1.4	-	1.3	1.0
	Pressure centered 2-position valve (MPa)	0.7	1.4	1.4	0.8	0.5
Pilot oil supply X internal (for spool C, F, G, H, P, T, V, Z, S ²⁾)		0.45 ³⁾	0.45 ⁴⁾	0.45 ⁴⁾	0.45 ⁴⁾	0.45 ⁴⁾
1)In a 3-position valve, pressure centered only possible if: Ppilot ≥ 2xPtank + Ppilot min. 2) Spool S only for size 16. 3) For the spools C, F, G, H, P, T, V, Z, the internal pilot oil supply is only possible if the flow from P to T in the central position (for 3-position valve) or when the valve moves through the central position (for 2-position valve) is large enough to ensure the pressure differential as 0.65MPa from P to T. 4) For the spools C, F, G, H, P, T, V, Z, S-via the pre-load valve or correspondingly large flow. 5) 28MPa for model 4WEH10..., 31.5MPa for model H-4WEH10... H-4WEH10... type is 31.5MPa						
Hydraulic oil		Mineral hydraulic oil or phosphate ester hydraulic oil				
Temperature range (°C)		-30 to +80 (NBR seal) -20~+80 (FKM seal)				
Viscosity range (mm²/s)		2.8 to 50 0				
Cleanliness of oil		The maximum allowable pollution level of oil is NAS1638 Class 9, so we recommend a filter with the minimum filtration accuracy β10≥75				
Pilot oil volume during switching process						
3-position valve spring centered (cm³)		2.04	5.72	7.64	14.2	29.4
2-position valve (cm³)		4.08	11.45	15.28	28.4	58.8
3-position valve hydraulic centered (cm³)		-	WH WEH	- -	WH WEH	WH WEH
from neutral position to position "a" (cm³)		-	2.83 2.83	- -	7.15 7.15	14.4 14.4
From position "a" to neutral position (cm³)		-	5.72 5.72	- -	14.18 7.0	29.4 15.1
From neutral position to position "b" (cm³)		-	5.72 5.72	- -	14.18 14.15	29.4 29.4
from position "b" to neutral position (cm³)		-	8.55 8.55	- -	19.88 5.73	43.8 14.4
Pilot oil flow for shortest switching time (L/min)		about 35	about 35	about 35	about 35	about 45
Weight	Valve with one solenoid (kg)	about 6.4	about 8.5	about 11.5	about 17.6	about 40.5
	Valve with two solenoid, spring centered (kg)	about 6.8	about 8.9	about 11.9	about 18.0	about 41.0
	Valve with two solenoid, hydraulic centered (kg)	about 6.8	about 8.9	about 11.9	about 19.0	about 41.0
	Valve with hydraulic control (kg)	about 5.5	about 7.3	about 10.5	about 16.5	about 39.5
	Switching time adjustment (kg)	about 0.8				
	Pressure reducing valve (kg)	about 0.4				
Installation position		Optional, except for the hydraulic return valve C, D, K, Z, Y installed horizontal				




Technical Specifications

Switching time (refers to the time from the solenoid closing to the main valve fully opening.)														
Size 10	Switching time for valve from neutral position to operating position (for DC (=) and AC (∼) operation)													
	at pilot pressure	(MPa)	∼7=			∼14=		∼21=		∼25=				
	3-position valve	(ms)	30	65	25	60	20	55	15	50				
	2-position valve	(ms)	35	80	30	75	25	70	20	65				
	Switching time for valve from operating position to neutral position(ms)													
	3-position valve	(ms)	30											
	2-position valve	(ms)	35	40	30	75	25	30	20	25				
Size 16	Switching time for valve from neutral position to operating position (for DC (=) and AC (∼) operation)													
	at pilot pressure	(MPa)	∼7=			∼15=			∼25=					
	3-position valve-spring centered	(ms)	25...30		40	25...30		40	25...30		40			
	2-position valve	(ms)	30...35		55	30...35		55	30...35		55			
	3-position valve - hydraulic centered	Solenoid operated	a	b	a	b	a	b	a	b	a	b		
		(ms)	30	30	40	40	30	30	40	40	30	30	35	40
	Switching time for valve from operating position to static position													
	3-position valve	(ms)	20 to 35 for ∼; 30 for =											
	2-position valve	(ms)	30...50		45	30...50		45	30...50		45			
	3-position valve - hydraulic centered	From-	a	b	a	b	a	b	a	b	a	b		
	(ms)	20...35		20	20...55		20	20...35		20				
Size 25	Switching time for valve from neutral position to operating position (for DC (=) and AC (∼) operation)													
	at pilot pressure	(MPa)	∼7=			∼14=			∼21=			∼25=		
	3-position valve-spring centered	(ms)	50	85	40	75	35	70	30	65				
	2-position valve	(ms)	120	160	100	130	85	120	70	105				
	3-position valve - hydraulic centered	Solenoid operated	a	b	a	b	a	b	a	b	a	b	a	b
		(ms)	20	35	55	65	30	35	55	65	25	30	50	60
	Switching time for valve from operating position to static position													
	3-position valve	(ms)	40 to 55 for ∼; 40 for =											
	2-position valve	(ms)	120	125	85	100	85	90	75	80				
	3-position valve - hydraulic centered	From-	a	b	a	b	a	b	a	b	a	b	a	b
	(ms)	30...50		30 35	30...50		30 35	30...50		30 35	30...50		30 35	
Size 32	Switching time for valve from neutral position to operating position (for DC (=) and AC (∼) operation)													
	at pilot pressure	(MPa)	∼5=			∼15=			∼25=					
	3-position valve-spring centered	(ms)	65	80	50	90	35	105						
	2-position valve	(ms)	100	130	75	100	60	115						
	3-position valve - hydraulic centered	Solenoid operated	a	b	a	b	a	b	a	b	a	b		
		(ms)	55	35	100	105	40	45	85	95	35	40	85	95
	Switching time for valve from operating position to static position													
	3-position valve	(ms)												
	2-position valve	(ms)	115...130		90	85...100		70	65...80		65			
	3-position valve - hydraulic centered	From-	a	b	a	b	a	b	a	b	a	b		
	(ms)	30...65		30 40	60...90		30 40	105...155		50 50				



Characteristic Curves 4WEH10

Model 4WEH10...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

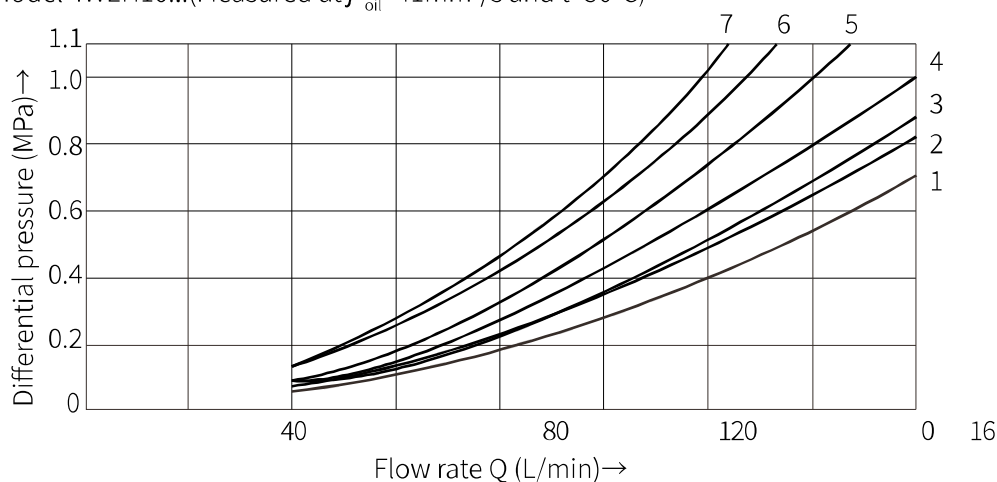

Spool	Working position				Spool	Working position		
	P-A	P-B	A-T	B-T		A-T	B-T	P-T
E, D, Y	2	2	4	5	F	3	-	6
F	1	4	1	4	G, T	-	-	7
G, T	4	2	2	6	H	1	3	5
H, C	4	4	1	4	L	3	-	-
J, K	1	2	1	3	P	-	7	5
L	2	3	1	4	U	-	4	-
M	4	4	3	4				
Q, V, W, Z	2	2	3	5				
R	2	2	3	-				
U	3	3	3	4				
P	4	1	3	4				

Characteristic Limit 4WEH10

Model 4WEH10...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

Allowable flow of 2-position and 3-position valves (L/min)			
Spool	Working pressure(MPa)		
	20	25	31.5
E, J, L, M, Q, R, U, V, W C, D, K, Z, Y	160		
H	160	150	120
G, T	160	160	140
F, P	160	140	120

Notice:

The given characteristic limits are suitable for the use of flow in both directions (e. g. from P to A and return from B to T at the same time).


Due to the power of the fluid in the valve, the characteristic limit allowed for only one flow direction might be significantly reduced (e.g. from P to A, while B is closed)!

The characteristic limits are measured when the solenoid is at the operating temperature, at 10% below the standard voltage and without tank preloading.



Characteristic Curves 4WEH16

Model 4WEH16...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

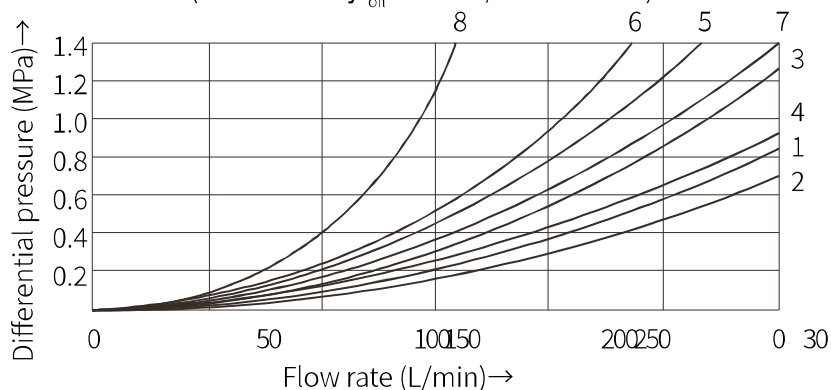

Spool	Working position				
	P-A	P-B	A-T	B-T	P-T
E, D, Y	1	1	1	3	-
F, P	2	2	3	3	-
G, T	5	1	3	7	6
H, C, Q, V, Z	2	2	3	3	-
J, K, L	1	1	3	3	-
M, W	2	2	4	3	-
R	2	2	4	-	-
U	1	1	4	7	-
S	4	4	4	-	8

Characteristic Limit 4WEH16

Model 4WEH16...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

Allowable flow of 2-position valve (L/min)					
Spool	Working pressure (MPa)				
	7	14	21	28	35
Main valve spring return ¹⁾					
C, D, K, Z, Y	300	300	300	300	300
Main valve spring return ²⁾					
C	300	300	300	300	300
D, Y	300	270	260	250	230
K	300	250	240	230	210
Z	300	260	190	180	160
Main valve hydraulic return					
HC, HD, HK	300	300	300	300	300
HZ, HY	300	300	300	300	300

1) The given flow value can be achieved when the minimum pilot pressure of 1.2MPa exists.

2) The given flow value is limiting the value at which the reset spring can return the valve when the pilot pressure decreases.

Allowable flow of 3-position valve (L/min)					
Spool	Working pressure (MPa)				
	7	14	21	28	35
Main valve spring return ¹⁾					
E, H, J, L, MQ, U, W, R	300	300	300	300	300
F, P	300	250	180	170	150
G, T	300	300	240	210	190
S	300	300	300	250	220
V	300	250	210	200	180
Pressure centered (minimum pilot pressure 1.6MPa)					Spool approx. to 160L/min
All spools	300	300		300	

Notice:


When using a 4/3-way valve with pressure centered in the main spool which exceeds the given performance limits, a higher pilot pressure is required. Therefore, if the pressure is 35MPa and the flow is 300L/min in the circuit, the pilot pressure of 1.6MPa is required.

The maximum flow of the valve only depends on the acceptable pressure drop through the valve.



Characteristic Curves 4WEH22

Model 4WEH22...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

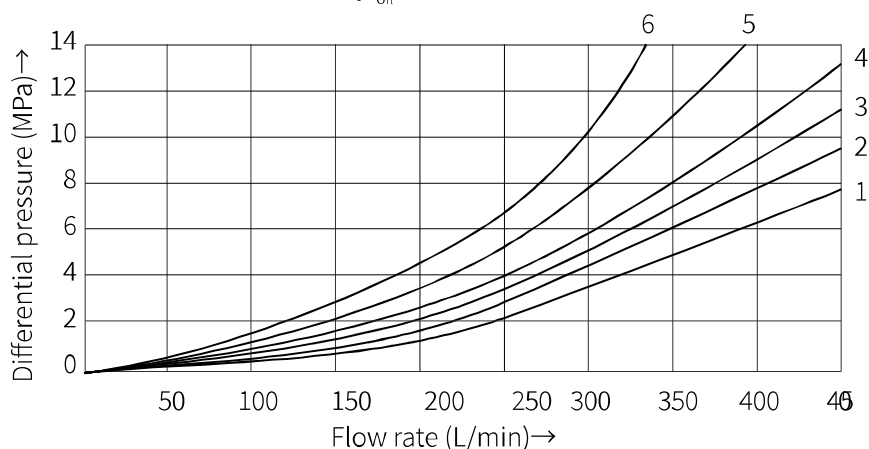

Spool	Switching position			
	P-A	P-B	A-T	B-T
E, M, P, Q, U, V	2	2	1	4
F	1	2	1	2
G, T	2	2	2	4
H, J, W	2	2	1	3
L	2	2	1	2
R	1	2	1	-

Spool	Neutral position		
	A-T	B-T	P-T
F	-	-	4
G, P	-	-	6
H	-	-	2
L	4	-	-
T	-	-	5
U	-	6	-

Characteristic Limit 4WEH22

Model 4WEH22...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

Allowable flow of 2-position valve L/min					
Spool	working pressure(MPa)				
	7	14	21	28	35
X external supply main valve spring return (with $P_{pilot\ min}=11\text{bar}/14\text{bar}$)					
C, D, K, Y, Z	450	450	450	450	450
X external supply main valve spring return ¹⁾					
C	450	450	320	250	200
D, Y	450	450	450	400	320
K	450	215	150	120	100
Z	350	300	290	260	160
X external supply hydraulic centered					
HC, HD, HK, HY, HZ	450	450	450	450	450
HC../O..	450	450	450	450	450
HD../O..	450	450	450	450	450
HK../O..	450	450	450	450	450
HZ../O..	450	450	450	450	450
HC../OF..	450	450	450	450	450
HD../OF..	450	450	450	450	450
HK../OF..	450	450	450	450	450
HZ../OF..	450	450	450	450	450

Allowable flow of 3-position valve L/min					
Spool	working pressure(MPa)				
	7	14	21	28	35
X external supply spring centered					
E, J, L, M, Q, U, W, R	450	450	450	450	450
H	450	450	300	260	230
G	400	350	250	200	180
F	450	270	175	130	110
V	450	300	240	220	160
T	400	300	240	200	160
P	450	270	180	170	110


When internal supply, a back pressure valve is required because of negative cover of spools Z, HZ, V and the flow less than 180L/min. It is also required due to negative cover of spools F, G, M, P and T.

1)The specified flow value is the limited value at which the reset spring can return the spool back to the end position when the pilot pressure disappears.



Characteristic Curves 4WEH25

Model 4WEH25...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

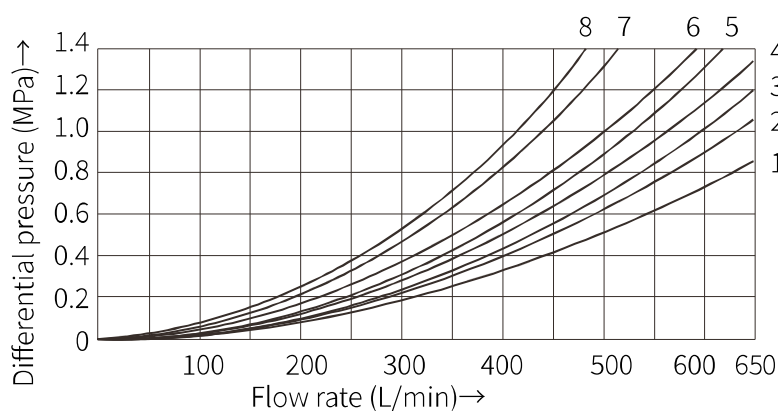

Spool	Working position				Spool	Working position			
	P-A	P-B	A-T	B-T		P-A	P-B	A-T	B-T
E	1	1	1	3	P	4	1	1	5
F	1	4	3	3	Q	2	2	3	5
G	3	1	2	4	Z	1	1	1	-
H	4	4	3	4	U	2	1	1	6
J	2	2	3	5	V	4	4	3	6
L	2	2	3	3	W	1	1	1	3
M	4	4	1	4	T	3	1	2	4

Characteristic Limit 4WEH25

Model 4WEH25...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

Allowable flow of 2-position valve (L/min)						with pre-load valve and X port internal supply
Spool	Working pressure(MPa)					
	7	14	21	28	35	
Main valve spring return ¹⁾						Spools C and Z approx. to 180 L/min
C, D, K, Z, Y	700	700	700	700	700	
Main valve spring return ²⁾						
C	700	700	700	700	700	
D, Y	700	650	400	350	300	
K	700	650	420	370	320	
Z	700	700	650	480	400	
Main valve hydraulic return						and HZ approximately to 180L/min
HC、HD、HK	700	700	700	700	700	
HZ、HY	700	700	700	700	700	
HC.../O	700	700	700	700	700	
HD.../O	700	700	700	700	700	
HK.../O	700	700	700	700	700	
HZ.../O	700	700	700	700	700	
HC.../OF	700	700	700	700	700	
HD.../OF	700	700	700	700	700	
HK.../OF	700	700	700	700	700	
HZ.../OF	700	700	700	700	700	
Allowable flow of 3-position valve (L/min)						with pre-load valve and X port internal supply
Spool	Working pressure(MPa)					
	7	14	21	28	35	
spring centered						Spools F, G, HP and T approximately to 180L/min
E、L、M Q、U、W	700	700	700	700	650	
G/T	400	400	400	400	400	
F	650	550	430	330	300	
H	700	650	550	400	360	
J	700	700	650	600	520	
P	650	550	430	330	300	
V	650	550	400	350	310	
R	700	700	700	650	680	
Pressure centered (minimum pilot pressure 1.8MPa)						
E/F/H/J	700	700	700	700	650	
L/M/P/Q	700	700	700	700	650	
R/U/V/W	700	700	700	700	650	
G/T	400	400	400	400	400	
When the pilot pressure higher than 3MPa						
G/T	700	700	700	700	700	




1) The given flow value can be achieved when the minimum pilot pressure of 1.3MPa exists.

2) The given flow value is limiting the value at which the reset spring can return the valve when the pilot pressure decreases.



Characteristic Curves 4WEH32

Model 4WEH32...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

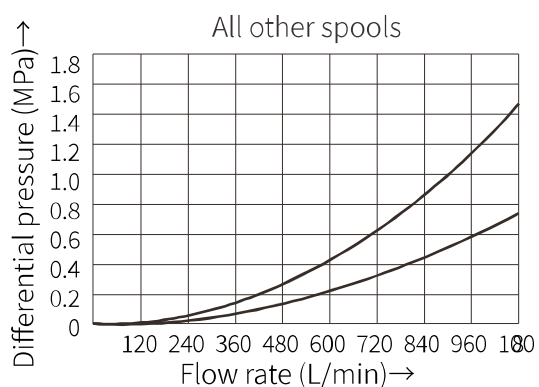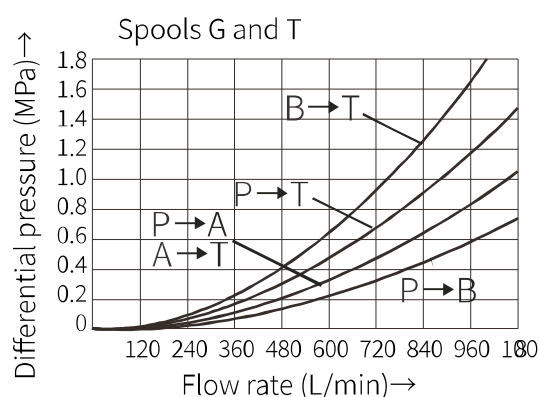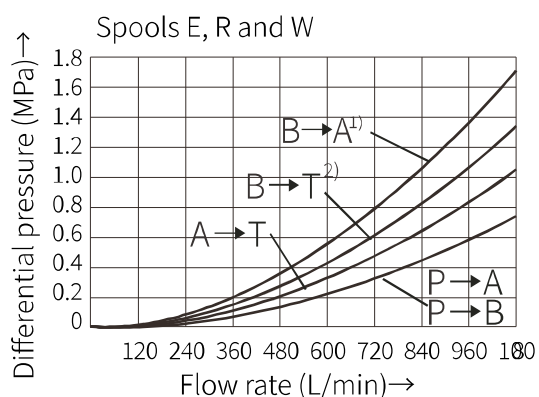

- 1) Only for spool R
2) Not for spool R

Characteristic Limit 4WEH32

Model 4WEH32...(Measured at $j_{oil}=41\text{mm}^2/\text{s}$ and $t=50^\circ\text{C}$)

Allowable flow of 2-position valve (L/min)							with pre-load valve and X port internal supply	Allowable flow of 3-position valve (L/min)							with pre-load valve and X port internal supply
Spool	Working pressure(MPa)					Main valve spring return ¹⁾		Spool	Working pressure(MPa)					Main valve spring return ¹⁾	
	7	14	21	28	25				7	14	21	28	25		
Main valve spring return ¹⁾							Spool Z approx to 180L/min	E, H, J, L, M Q, U, W, R							Spools F, G, H, P and T approximately to 180L/min
C、D、 K、Z、Y	1100	1040	860	750	680	G, T, H, F, P									
Main valve spring return ²⁾								V							
C	1100	1040	860	800	700	Pressure centered (minimum pilot pressure 0.85MPa)									
D、Y	1100	1040	540	480	420	All spools									
K	1100	1040	860	500	450	Spool Z approx to 180L/min									
Z	1100	1040	860	750	650										
Main valve hydraulic return															
HC、 HD、 HK	1100	1040	860	750	680	Spool Z approx to 180L/min									
HZ、 HY	1100	1040	860	750	680										

Notice:

When using a 4/3-way valve with pressure centered in the middle position, the pressure in the middle position of the valve must be maintained at 0.85MPa or higher.

Notice:

When using a 4/3-way valve with pressure centered in the main spool which exceeds the given performance limits, a higher pilot pressure is required. Therefore, if the pressure is 35MPa and the flow is 300L/min in the circuit, the pilot pressure of 1.5MPa is required.

The maximum flow of the valve only depends on the

1) The given flow value can be achieved when the minimum pilot pressure of 1.0MPa exists.

2) The given flow value is limiting the value at which the reset spring can return the valve when the pilot pressure decreases.




Switching time adjustment, pressure reducing valve and pre-load valve

Switching time adjustment

To control the switching time of the main valve (1), a double throttle check valve (12) is installed between the pilot valve and the main valve.

Conversion from meter-in control (13) to meter-out control (14):

Remove the pilot valve (4) but retain the O-ring support plate (15), turn the throttle check valve around its longitudinal axis and reassemble it on the mounting surface, install the pilot valve (4). Tightening torque $M_A=9\text{Nm}$ for fixing screw (16).

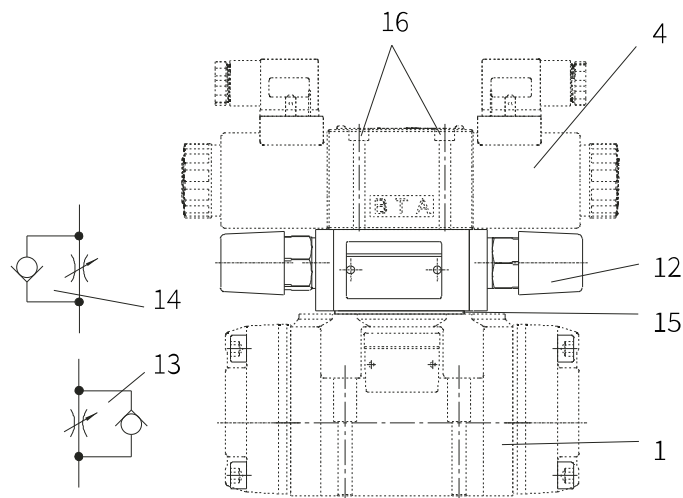


Model 4WEH.../S or S2

Pressure reducing valve "D3"

The pressure reducing valve (17) must be used if the pilot pressure exceeds 25MPa. The secondary pressure should be maintained at 4.5MPa. When using the pressure reducing valve D3, it must install a plug-in throttle B10 in port P of the pilot valve.


Tightening torque $M_A=9\text{Nm}$ for fixing screw (16).

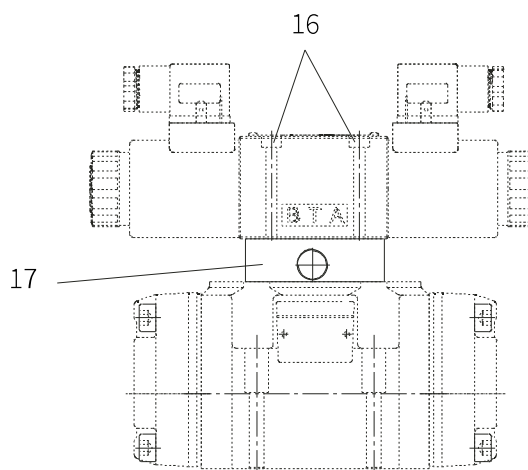


Model 4WEH.../.../D3

Pre-load valve (not for size 10)

In the valve with pressureless bypass and internal pilot oil supply, a pre-load valve (18) is installed in port P of the main valve to built up the minimum pilot pressure.

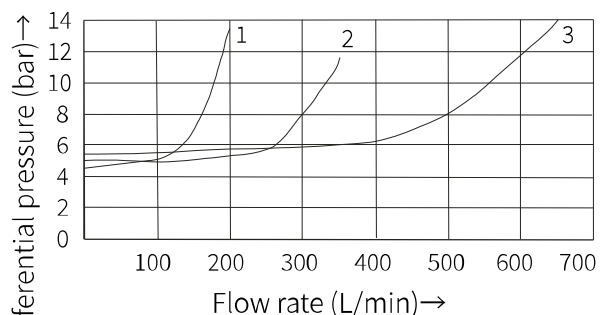

- 1 Size 16
- 2 Size 25
- 3 Size 32

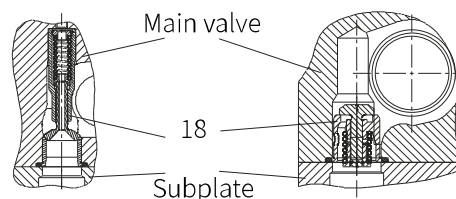

Model 4WEH16...-7X/.../P4.5


Model 4WEH25.../.../P4.5
4WEH32.../.../P4.5



Unit Dimensions 4WEH10

(Dimensions in mm)

WEH10...4XJ/...

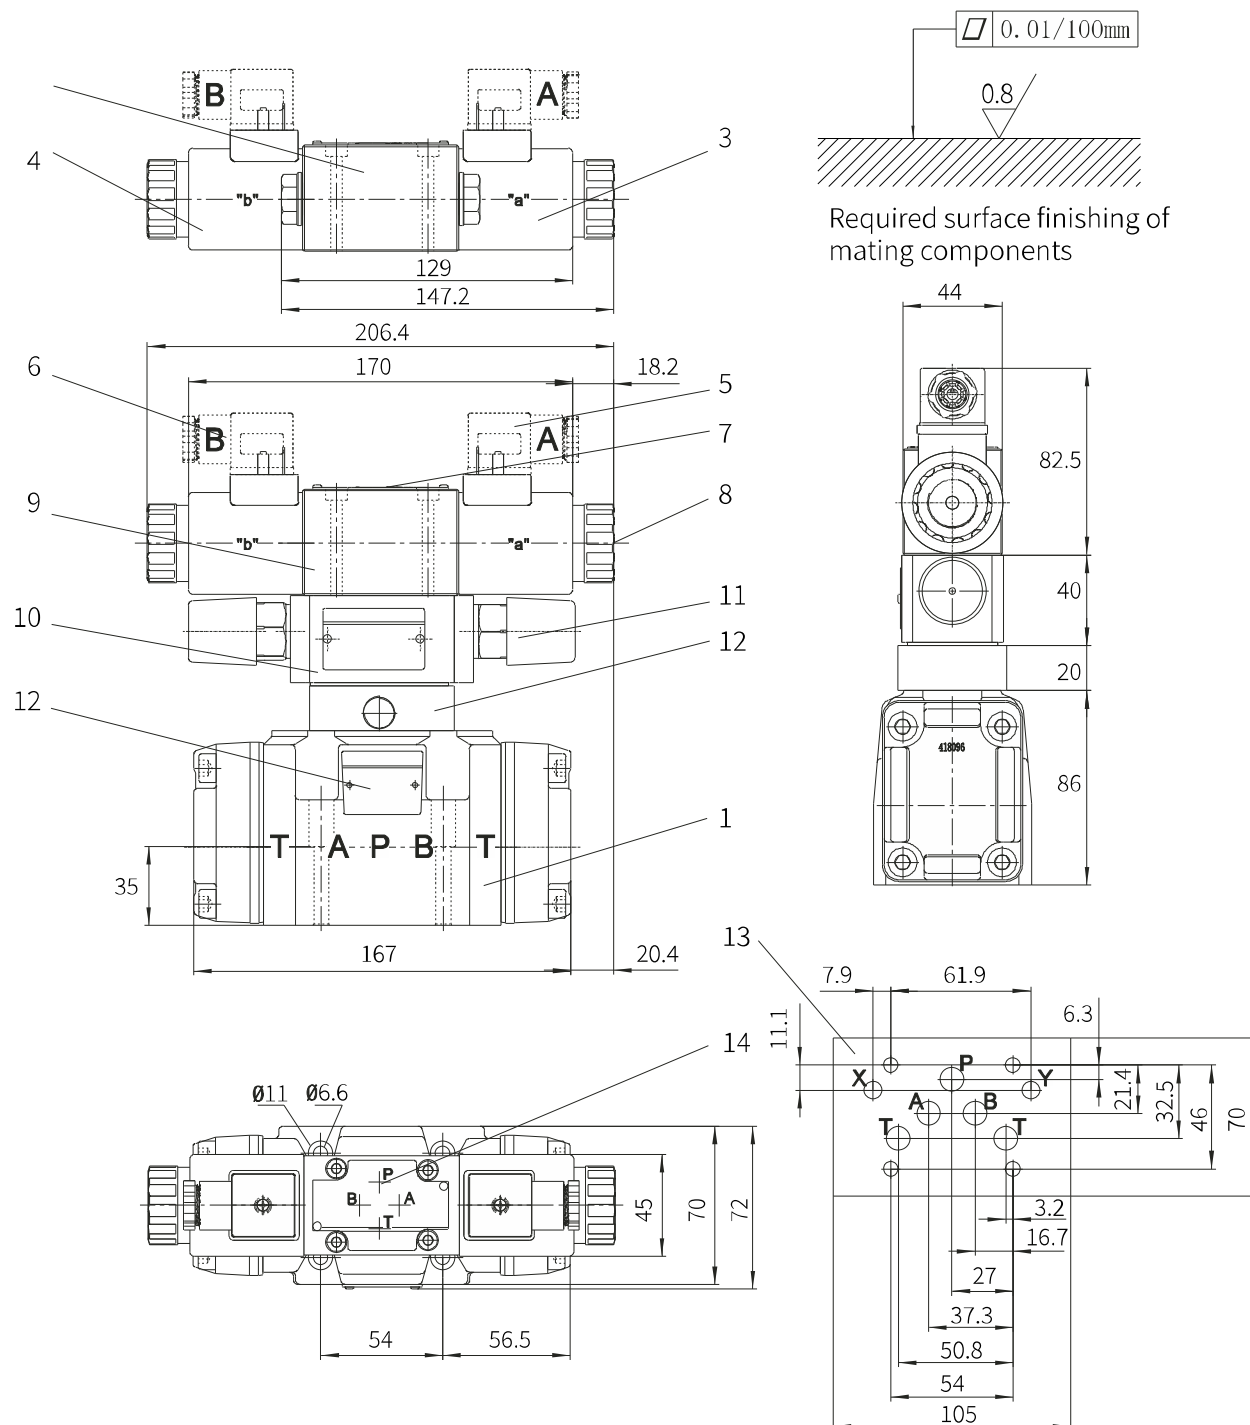

Required surface finishing of mating components

- 1 Main valve
- 2 2-position valve with one solenoid and plug Z4
- 3 Solenoid a
- 4 Solenoid b
- 5 Gray plug (or transparent plug)
- 6 Black plug (or transparent plug)
- 7 Name plate of pilot valve
- 8 Manual emergency operation
- 9 2-position or 3-position valve with two solenoids and plug Z4
- 10 Switching time adjustment
- 11 Adjustment bolt
- 12 Pressure reducing valve

- 13 Port layout of main valve (valve mounting surface)
- 14 Port position of pilot oil
- 15 Name plate of complete valve
- Valve fixing screw
M6x45-10.9 grade GB/T70.1-2000
Tightening torque $M_A=13.7\text{Nm}$





Unit Dimensions 4WEH10

(Dimensions in mm)

Dimension of additional devices for model WEH10

The installation range of the stroke adjustment is 6.5mm. The stroke limiter is used to adjust the stroke of the main spool. Loosen the lock nut and rotate the adjusting rod clockwise, the stroke of the main spool will be shortened (the adjustment must be carried out without pressure in the control chamber)


1 turn = 1mm stroke

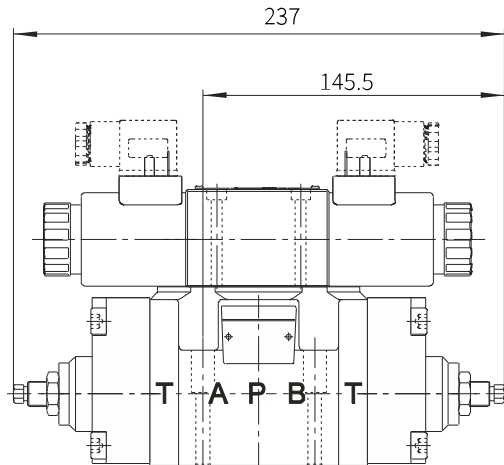

Stroke adjustment installed on the ends A and B of the main valve.../10


Stroke adjustment installed on the end A of the main valve.../11

Stroke adjustment installed on the end B of the main valve.../12

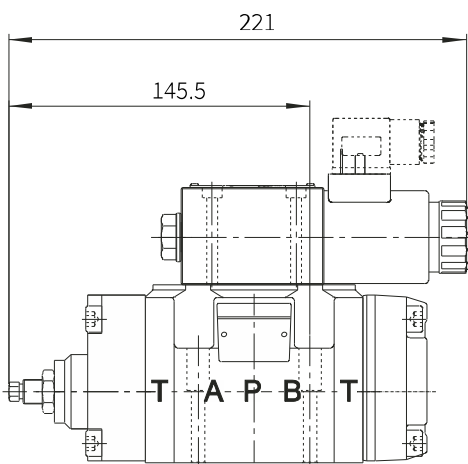

Stroke adjustment installed on the end A of the main valve.../11

(2-position valve, symbols C, D, K, Z)

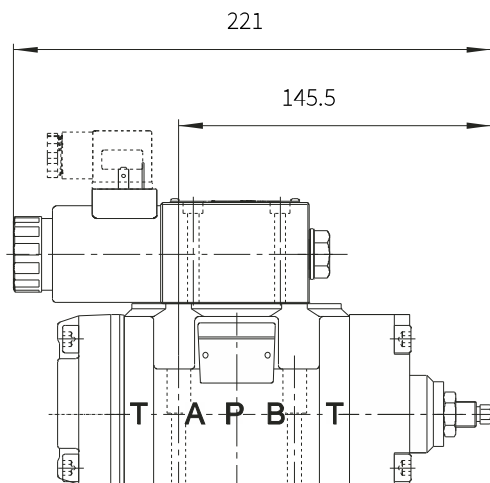

Stroke adjustment installed on the end B of the main valve.../12




(2-position valve, symbol Y)



Unit Dimensions 4WEH16

(Dimensions in mm)

WEH16...7XJ/...

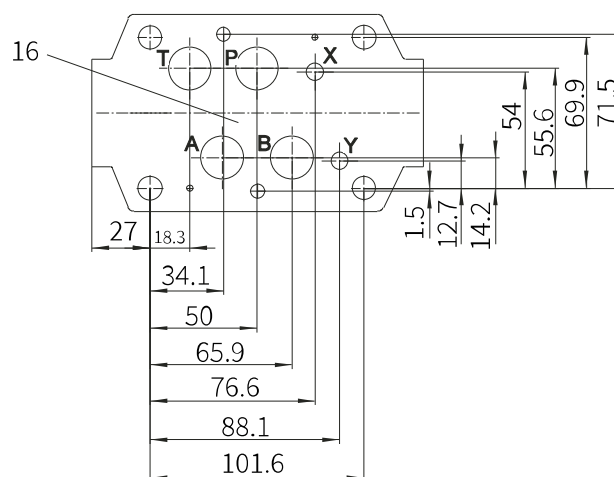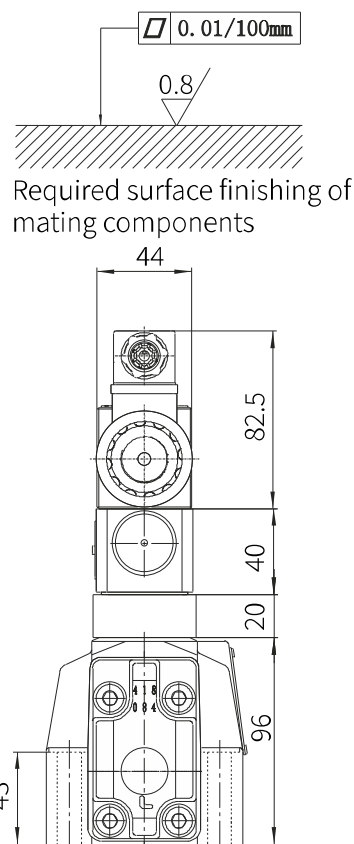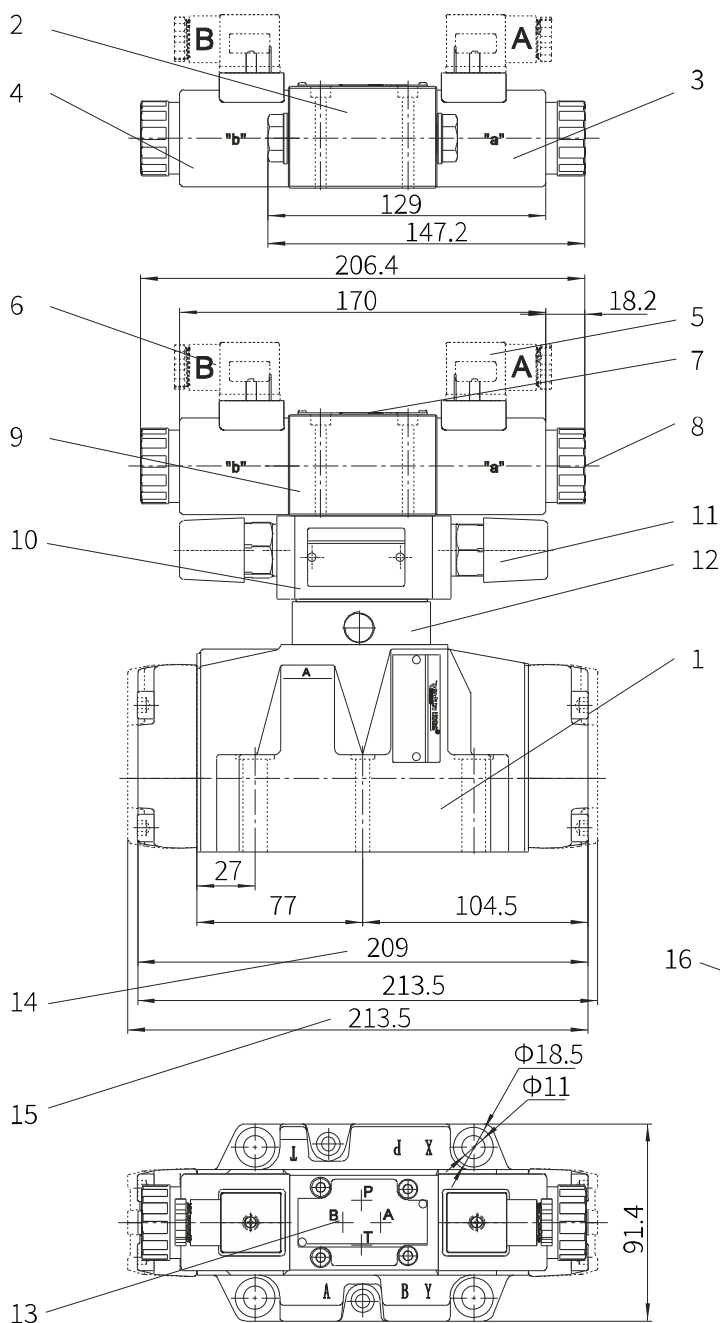

1 Main valve

2 2-position valve with one solenoid and plug Z4

3 Solenoid a

4 Solenoid b

5 Gray plug (or transparent plug)

6 Black plug (or transparent plug)

7 Name plate of pilot valve

8 Manual emergency operation

9 2-position or 3-position valve with two solenoids and plug Z4

10 Switching time adjustment

11 Adjustment bolt

12 Pressure reducing valve

Valve fixing screw

2-M6x55-10.9 grade GB/T70.1-2000

Tightening torque $M_A=13.7\text{Nm}$

13 Port layout of main valve (valve mounting surface)

14 Size of 3-position valve with spring centered

15 Size of 2-position valve with spring centered

16 Main valve connection diagram

4-M10x60-10.9 grade GB/T70.1-2000

Tightening torque $M_A=60\text{Nm}$





Unit Dimensions 4WEH16

(Dimensions in mm)

Dimension of additional devices for model WEH16

The installation range of the stroke adjustment is 10mm. The stroke limiter is used to adjust the stroke of the main spool. Loosen the lock nut and rotate the adjusting rod clockwise, the stroke of the main spool will be shortened (the adjustment must be carried out without pressure in the control chamber)


1 turn = 1.5mm stroke

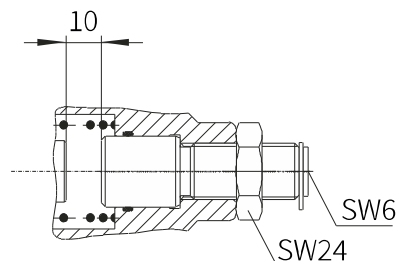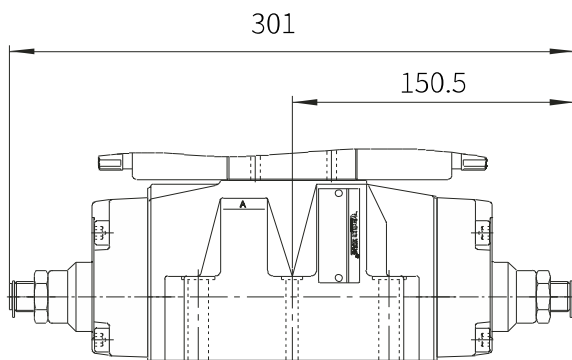

Stroke adjustment installed on the ends A and B of the main valve.../10


Stroke adjustment installed on the end A of the main valve.../11

Stroke adjustment installed on the end B of the main valve.../12

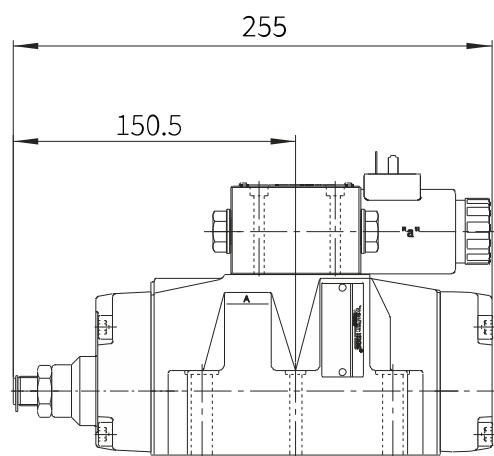

Stroke adjustment installed on the end A of the main valve.../11

(2-position valve, symbols C, D, K, Z)

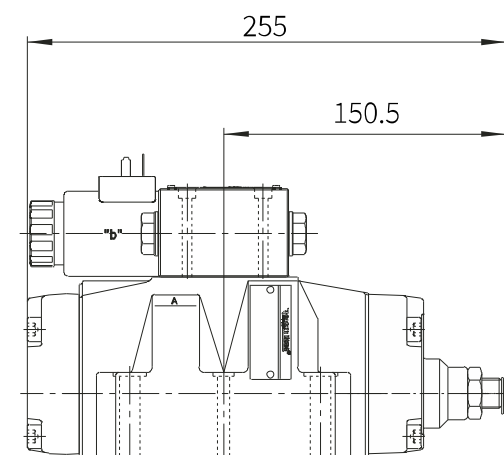

Stroke adjustment installed on the end B of the main valve.../12




(2-position valve, symbol Y)



Unit Dimensions 4WEH22

(Dimensions in mm)

WEH22...7XJ/...

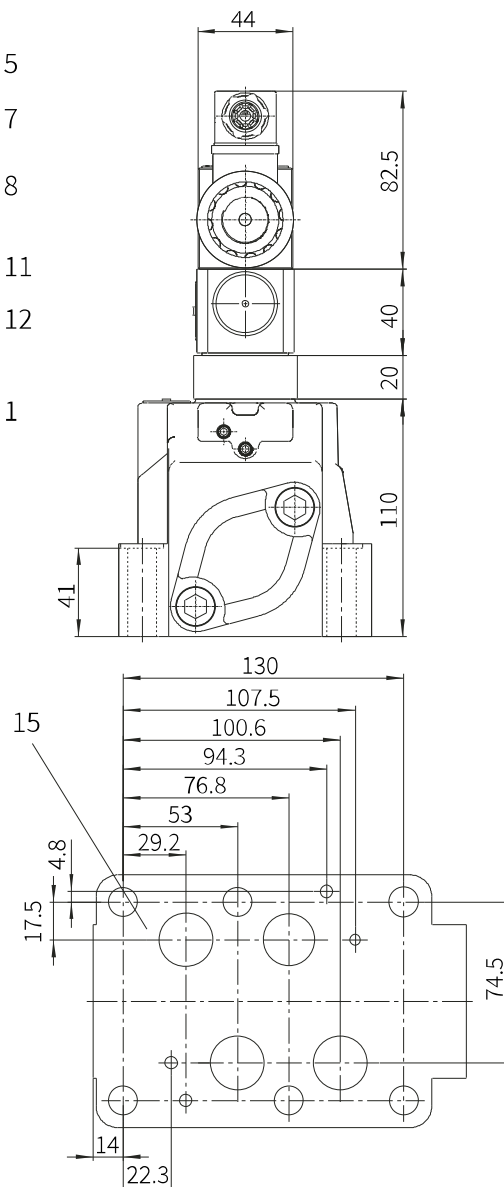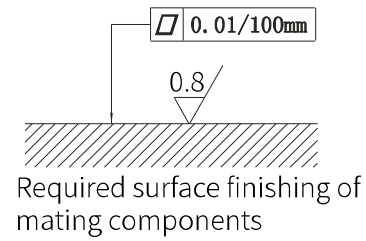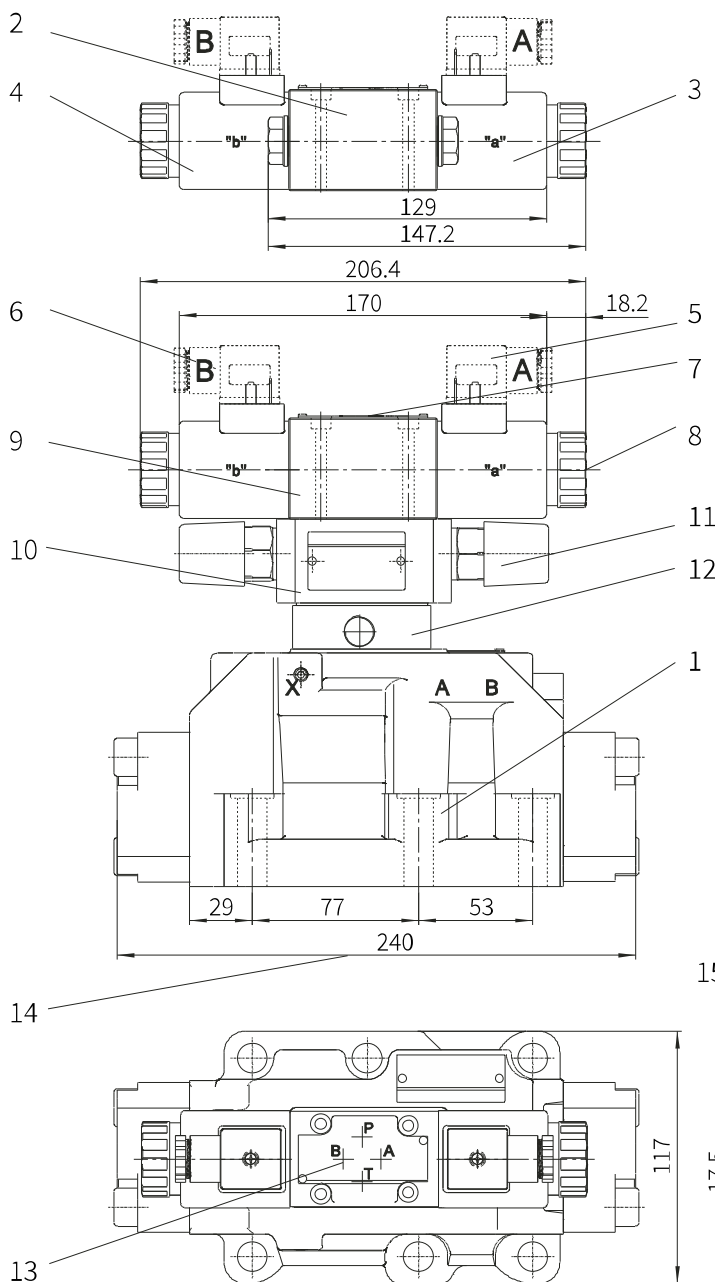

- | | |
|--|---|
| 1 Main valve | 7 Name plate of pilot valve |
| 2 2-position valve with one solenoid and plug Z4 | 8 Manual emergency operation |
| 3 Solenoid a | 9 2-position or 3-position valve with two solenoids and plug Z4 |
| 4 Solenoid b | 10 Switching time adjustment |
| 5 Gray plug (or transparent plug) | 11 Adjustment bolt |
| 6 Black plug (or transparent plug) | 12 Pressure reducing valve |

- 13 Port layout of main valve (valve mounting surface)
- 14 Size of 3-position valve with spring centered
- 15 Main valve connection diagram

Valve fixing screw
6-M12x60-10.9 grade GB/T70.1-2000
Tightening torque $M_A=95\text{Nm}$

(Dimensions in mm)

Technical drawing of a 4/3-way directional control valve with 16 numbered callouts. The drawing includes three views: a top view, a front view, and a side view. Dimensions are provided for various parts and overall sizes. Callouts 1-16 identify specific components like ports, solenoids, and the valve body.

Top View (Top):



- Callouts: 1 (Valve body), 2 (Solenoid A), 3 (Solenoid B), 4 (Port), 5 (Port), 6 (Port), 7 (Port), 8 (Port), 9 (Port), 10 (Port), 11 (Port), 12 (Port), 13 (Port), 14 (Port), 15 (Port), 16 (Port).
- Dimensions: 129, 147.2, 206.4, 170, 18.2.

Front View (Middle):

- Callouts: 1 (Valve body), 2 (Solenoid A), 3 (Solenoid B), 4 (Port), 5 (Port), 6 (Port), 7 (Port), 8 (Port), 9 (Port), 10 (Port), 11 (Port), 12 (Port), 13 (Port), 14 (Port), 15 (Port), 16 (Port).
- Dimensions: 298, 324.5, 324.5.

Side View (Bottom):

- Callouts: 1 (Valve body), 2 (Solenoid A), 3 (Solenoid B), 4 (Port), 5 (Port), 6 (Port), 7 (Port), 8 (Port), 9 (Port), 10 (Port), 11 (Port), 12 (Port), 13 (Port), 14 (Port), 15 (Port), 16 (Port).
- Dimensions: 129, 147.2, 206.4, 170, 18.2.

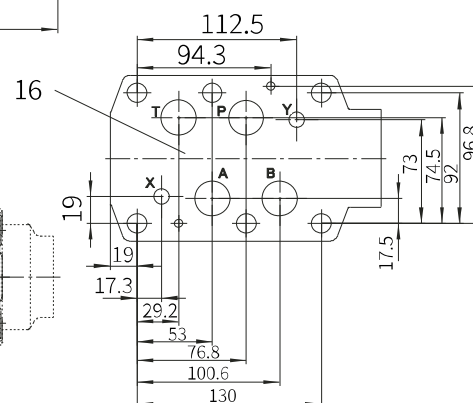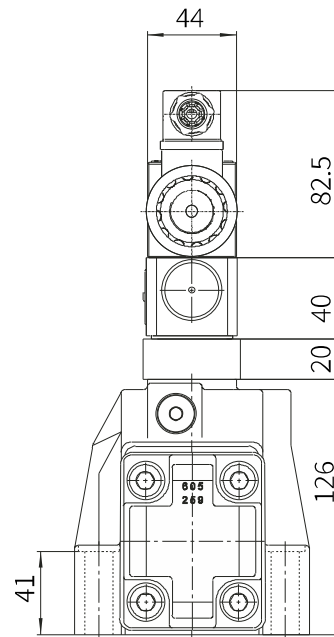

- | | | |
|---|--|--|
| 1 Main valve | 7 Name plate of pilot valve | 13 Port layout of main valve
(valve mounting surface) |
| 2 2-position valve with one
solenoid and plug Z4 | 8 Manual emergency operation | 14 Size of 3-position valve with spring centered |
| 3 Solenoid a | 9 2-position or 3-position valve
with two solenoids and plug Z4 | 15 Size of 2-position valve with spring centered |
| 4 Solenoid b | 10 Switching time adjustment | 16 Main valve connection diagram |
| 5 Gray plug (or transparent plug) | 11 Adjustment bolt | Valve fixing screw |
| 6 Black plug (or transparent plug) | 12 Pressure reducing valve | 6-M12x60-10.9 grade GB/T70.1-2000
Tightening torque $M_A=95\text{Nm}$ |

Valve fixing screw
6-M12x60-10.9 grade GB/T70.1-2000
Tightening torque $M_A=95\text{Nm}$





Unit Dimensions 4WEH25

(Dimensions in mm)

Dimension of additional devices for model WEH25

The installation range of the stroke adjustment is 12.5mm. The stroke limiter is used to adjust the stroke of the main spool. Loosen the lock nut and rotate the adjusting rod clockwise, the stroke of the main spool will be shortened (the adjustment must be carried out without pressure in the control chamber)


1 turn = 1.5mm stroke

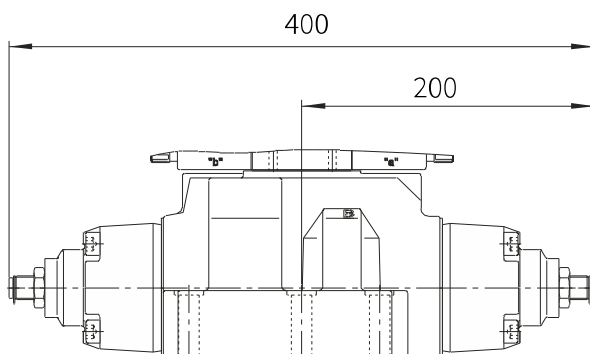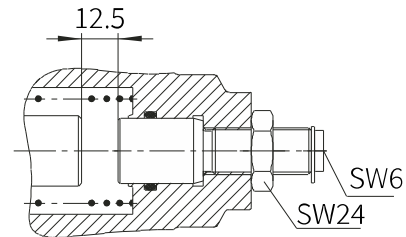

Stroke adjustment installed on the ends A and B of the main valve.../10


Stroke adjustment installed on the end A of the main valve.../11

Stroke adjustment installed on the end B of the main valve.../12

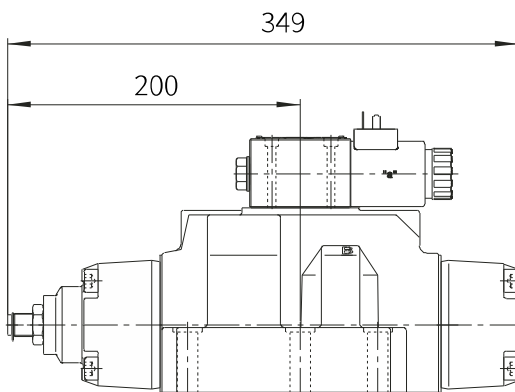

Stroke adjustment installed on the end A of the main valve.../11

(2-position valve, symbols C, D, K, Z)

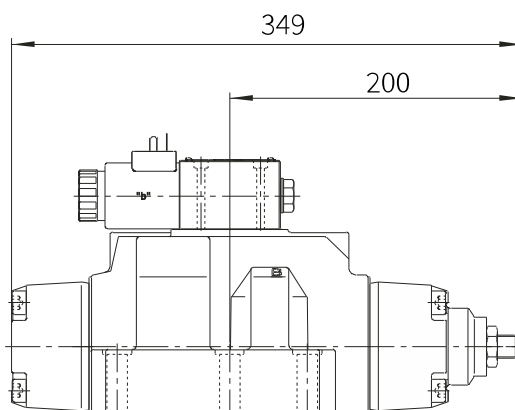





Stroke adjustment installed on the end B of the main valve.../12

(2-position valve, symbol Y)



Unit Dimensions 4WEH32

(Dimensions in mm)

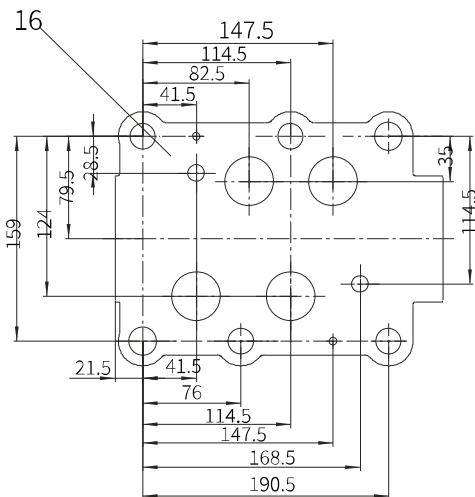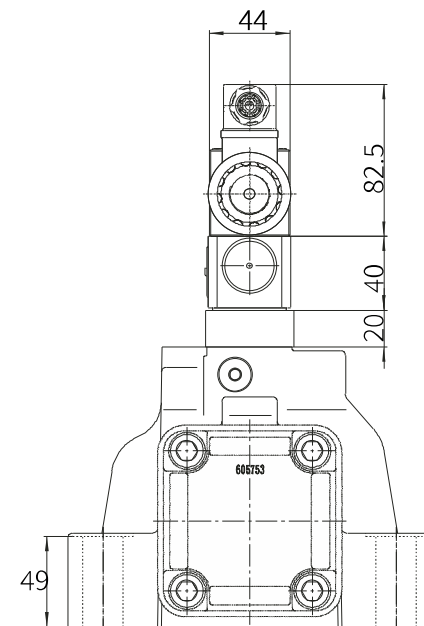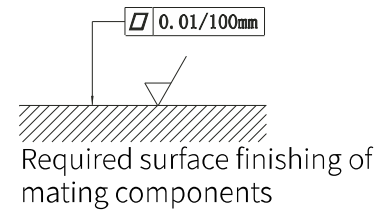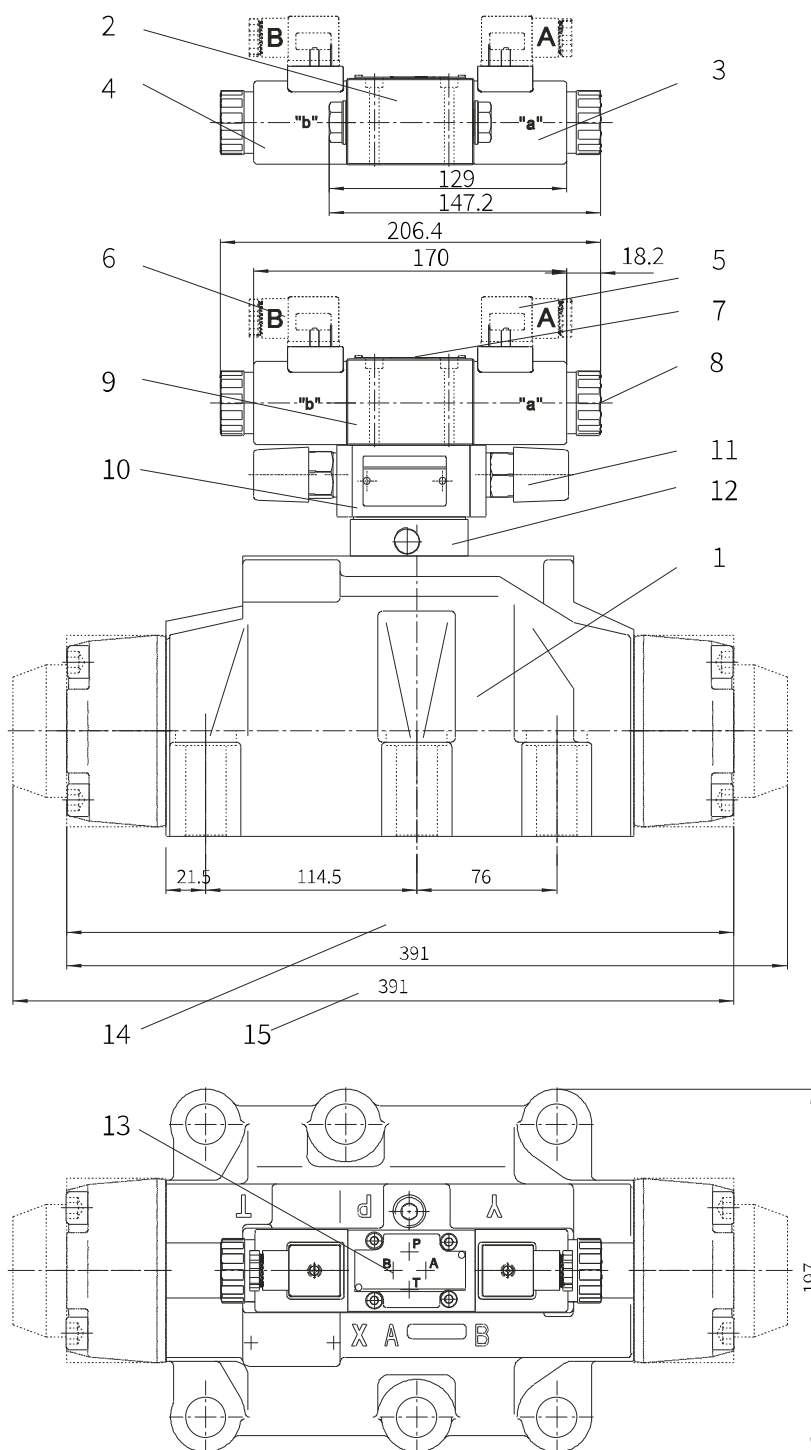

1 Main valve

2 2-position valve with one solenoid and plug Z4

3 Solenoid a

4 Solenoid b

5 Gray plug (or transparent plug)

6 Black plug (or transparent plug)

7 Name plate of pilot valve

8 Manual emergency operation

9 2-position or 3-position valve with two solenoids and plug Z4

10 Switching time adjustment

11 Adjustment bolt

12 Pressure reducing valve

13 Port layout of main valve

14 Size of 3-position valve with spring centered

15 Size of 2-position valve with spring centered

16 Main valve connection diagram

Valve fixing screw

6-M20x80-10.9 grade GB/T70.1-2000

Tightening torque $M_A=373\text{Nm}$





Unit Dimensions 4WEH32

(Dimensions in mm)

Dimension of additional devices for model WEH32

stroke limiter is used to adjust the stroke of the main spool.
Loosen the lock nut and rotate the adjusting rod clockwise, the stroke of the main spool will be shortened (the adjustment must be carried out without pressure in the control chamber)


1 turn = 1.5mm stroke

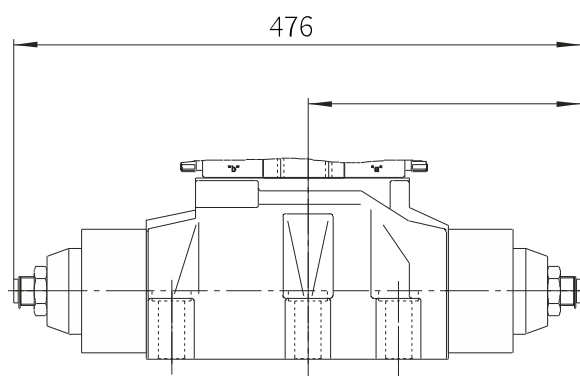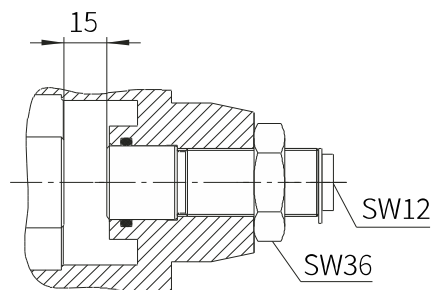

Stroke adjustment installed on the ends A and B of the main valve.../10


Stroke adjustment installed on the end A of the main valve.../11

Stroke adjustment installed on the end B of the main valve.../12

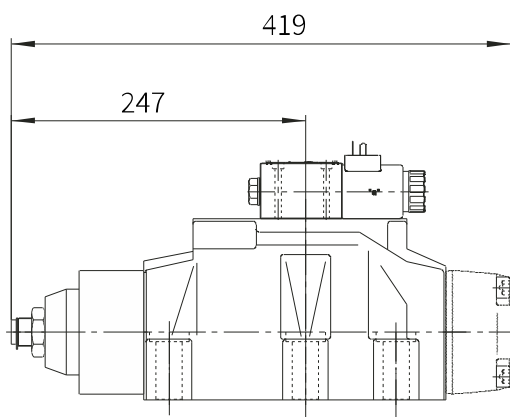

Stroke adjustment installed on the end A of the main valve.../11

(2-position valve, symbols C, D, K, Z)

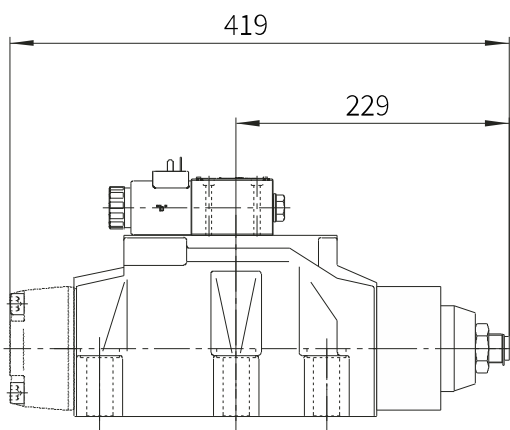


Stroke adjustment installed on the end B of the main valve.../12

(2-position valve, symbol Y)



F-127, Phase-VIII, Focal Point,
Ludhiana-141010, Punjab (INDIA)
PH: 0161-2672777, 0161-2672778
E-mail: sales@thmhuade.com
Website: www.thmhuade.com



Follow us:

